

Xerox® Phaser 4600/4620

User Guide



©2010 Xerox Corporation. XEROX[®] and XEROX and Design[®] are trademarks of Xerox Corporation in the United States and/or other countries.

Changes are periodically made to this document. Changes, technical inaccuracies, and typographic errors will be corrected in subsequent editions.

Document Version 1.0: November 2010

Contents

1 Getting Started

Welcome	8
Machine Overview	9
Front and Rear View	9
Internal Components	10
Options and Components	10
Control Panel Overview	11
Powering on the Machine	12
Network Connection	12
Printer Driver Installation	13
Downloading the Xerox Printer Driver	13
Using the Add Printer Wizard	13
Uninstalling	15
Loading Paper	16
Paper Tray 1 (Bypass Tray)	16
Paper Tray 2 and Paper Trays 3, 4, 5 and 6 (optional)	16
High Capacity Feeder (optional)	17
Menu Options	19
Jobs	19
Information	20
Tray Management	21
Tray Paper Settings	22
Tools	22
Troubleshooting	22
General Care and Consumables	23
Customer Replaceable Units	23
Cleaning Tasks	23
Logging On and Off	24
Further Assistance	25
Xerox Support Center	25
Documentation	25

2 Print

Printer Drivers	28
Printing using Windows	29
Control Options	29
Print Procedure	30
Paper/Output	31
Special Pages	34
Layout/Watermark	37
Advanced	39

Printing using Macintosh.....	40
Printing a Document.....	40
Changing Printer Settings.....	40
Printing using Linux.....	42
Printing from Applications.....	42
Printing Files.....	42
Configuring Printer Properties.....	43
3 Jobs	
Active Jobs.....	46
Personal & Secure Jobs.....	47
Printing Personal & Secure Jobs.....	47
Saved Jobs.....	48
Printing a Saved Job.....	48
Saving a Job.....	49
Completed Jobs.....	50
4 USB Flash Memory	
Inserting the USB Memory Device.....	52
Printing from USB Memory Device.....	53
5 Paper and Other Media	
Loading Paper.....	56
Preparing Paper for Loading.....	56
Paper Tray 1 (Bypass Tray).....	56
Paper Tray 2 and Paper Trays 3, 4, 5 and 6 (optional).....	57
High Capacity Feeder (optional).....	58
Tray Management and Settings.....	59
Tray Management Settings.....	59
Tray Paper Settings.....	61
Media Specifications.....	62
Media Guidelines.....	62
Media Types.....	63
6 CentreWare Internet Services	
Using CentreWare Internet Services.....	66
Status.....	67
General.....	67
Alerts.....	67
Trays.....	68
Consumables.....	68
SMart eSolutions.....	68

Jobs	71
Active Jobs	71
Personal & Secure Jobs	71
Saved Jobs	72
Completed Jobs	72
Print	73
Properties	74
Support	75
7 Setups	
Accessing Tools	78
Configuration Page	79
Setup	80
Network Settings	80
PostScript Setup	81
PCL Setup	81
General Setup	82
Machine Settings	82
File Security	85
Special Feature Options	86
Clone Printer	87
Accounting Enablement	88
8 General Care and Troubleshooting	
General Care	90
Customer Replaceable Units	90
Routine Maintenance Items	94
Cleaning the Machine	95
Moving the Machine	96
Troubleshooting	97
Fault Clearance	97
Error Messages	104
Paper Feeding Problems	106
Printing Problems	107
Printing Quality Problems	113
Further Assistance	118
Xerox Support Center	118
Locating the Serial Number	118
Troubleshooting Reports	118
Maintenance Assistant	119
9 Specifications	
Machine Specifications	122
Paper Supply	123
Output Modules	124
Electrical Specifications	126

Print Specifications	127
10 Safety	
Notices and Safety	130
Safety Labels and Symbols.....	131
Operational Safety Information.....	132
Electrical Supply	132
Ozone Safety Information	134
Maintenance Information.....	135
Consumables Information.....	135
Product Safety Certification	135
Basic Regulations.....	136
United States (FCC Regulations).....	136
Canada (Regulations).....	136
European Union	137
Turkey RoHS Regulation.....	137
China RoHS Regulation	138
Material Safety Data	139
Product Recycling and Disposal.....	140
USA & Canada	140
European Union	141
Energy Program Compliance	142
All Markets	142
EH&S Contact Information.....	143
Index	

Getting Started

1

Before you use your machine, take some time to familiarize yourself with the various features and options.

- [Welcome](#) on page 8
- [Machine Overview](#) on page 9
- [Printer Driver Installation](#) on page 13
- [Loading Paper](#) on page 16
- [Menu Options](#) on page 19
- [General Care and Consumables](#) on page 23
- [Logging On and Off](#) on page 24
- [Further Assistance](#) on page 25

Welcome

Thank you for choosing a Xerox Phaser 4600/4620 series machine. These products have been designed for ease of use. To use your machine to its fullest potential, take some time to read this User Guide.

The chapters within this guide offer additional information on the features and options available. For additional assistance visit our customer website at www.xerox.com, use the CentreWare Help system or click on the **Help** button in the printer driver.





The Xerox Phaser 4600/4620 are laser printers. The Xerox Phaser 4600 prints at 55 pages per minute for Letter (52 ppm for A4). The Xerox Phaser 4620 prints at 65 pages per minute for Letter (62 ppm for A4).

The features and functions available on your machine depend on the options purchased. Paper Tray 1 (Bypass) and Paper Tray 2 are provided as standard. The Duplex Unit is standard on the Xerox Phaser 4620 and optional on the Xerox Phaser 4600. Additional Paper Trays, a Stand, a Finisher, a High Capacity Feeder, additional memory, a hard disk drive and a 4-Bin Mailbox are available as options.

Machine Overview

Before you use your machine, take some time to familiarize yourself with the various features and options.


Front and Rear View

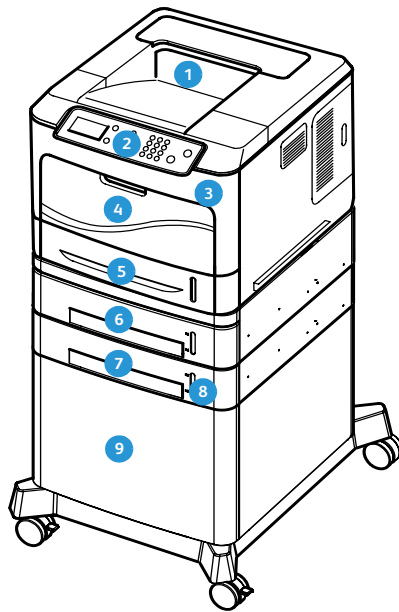

- | | |
|-----------------------------------|--|
| 1 Output Tray | 10 Type A USB Port |
| 2 Control Panel | 11 Type B USB Port |
| 3 USB Memory Port | 12 Configuration Card Slot |
| 4 Paper Tray 1 (Bypass) | 13 Ethernet Port |
| 5 Paper Tray 2 | 14 Power Switch |
| 6 Paper Tray 3 (Optional) | 15 Rear Door |
| 7 Paper Tray 4 (Optional) | 16 Duplex Unit (Optional 4600 / Standard 4620) |
| 8 Paper Level Indicator | 17 Finisher (Optional) |
| 9 High Capacity Feeder (Optional) | 18 Staple Cartridge Cover |
| | 19 4-Bin Mailbox (Optional) |

Internal Components

- 1 Toner Cartridge
- 2 Smart Kit Drum Cartridge
- 3 Fuser Unit
- 4 Transfer Roller

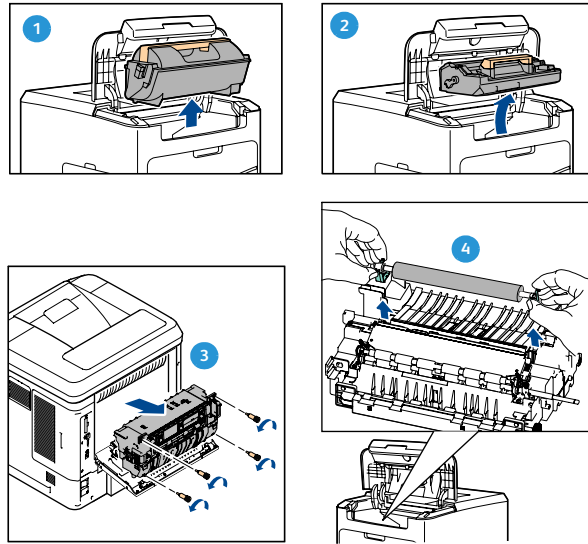

Options and Components

	Phaser 4600/4620
Direct/Network Printing	Standard
Paper Tray 1 (Bypass)	Standard
Paper Tray 2	Standard
Paper Tray 3	Optional
Paper Trays 4, 5 and 6	Optional
High Capacity Feeder	Optional
Stand	Optional
Finisher	Optional
4-Bin Mailbox	Optional
Duplex Unit	Optional 4600 / Standard 4620
USB Port	Standard
Hard Disk Drive (160 GB)	Optional
System Memory (256MB)	Standard
Additional Memory (512MB)	Optional
PostScript and PCL Fonts	Standard
Wireless LAN	Optional

Control Panel Overview




1	Display Screen: Displays all the available programming features, plus general machine information.
2	Menu: Enters <i>Menu Mode</i> and scrolls through the available menus.
3	Back: Sends you back to the previous menu. If a fault has occurred and the <i>Error</i> screen is not visible, press the Back button to access the <i>Error</i> screen. Pressing the Back button repeatedly alternates between the <i>Machine Status</i> screen and the <i>Error</i> screen.
4	Status LED: - LED Off - printer is in power saver mode. - Solid Green - printer is ready to print. - Blinking Green - warming up or printing in process. - Solid Yellow - error condition, printer has stopped. - Blinking Yellow - warning condition, printer continues to print.
5	Arrows: Use the up/down and left/right arrows to scroll through the options available in the selected menu, and increase or decrease values. When entering numbers or letters, the left/right arrows allow users to move left or right to change or enter a new letter or number.
6	OK: Confirms the selection on the screen or provides further information if the Error screen is displayed.
7	Keypad: Use to enter alphanumeric characters.
8	Help: If available, accesses additional information.
9	Stop: Press to cancel the current job or to log out of a local security or accounting feature. The Stop button is also used to change paper tray settings when paper is added to a tray.
10	Energy Saver: Displays when the machine is in <i>Power Saver</i> mode. Press the Energy Saver button to wake up from <i>Power Saver</i> mode or to enter <i>Power Saver</i> mode.

Powering on the Machine

The On/Off switch and the power inlet are at the rear of the machine.

1. Connect the **AC Power Cord** ❶ to the machine and a power outlet. The power cord must be plugged into a grounded power socket.
2. Press the **ON/OFF** ❷ switch to the ON (I) position.
3. To power off, press the **ON/OFF** switch to the OFF (O) position.

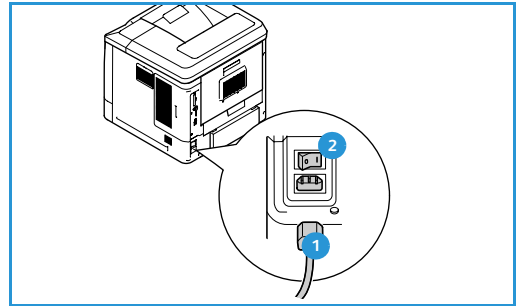


Network Connection

If the machine is to be network connected, follow these steps to connect the network cable.

1. Connect a 10/100/1000 BaseT Ethernet cable to the **Ethernet Port** ❸ at the rear of the machine.
2. Connect the other end of the cable to your network port.

The machine will attempt to join the network (this may take a few minutes).

To configure the Network Settings at the machine, refer to [Network Settings](#) on page 80. For full network installation instructions, refer to the [System Administrator Guide](#).

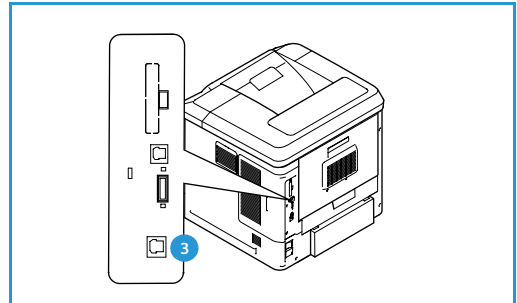

Printer Driver Installation

The Xerox printer driver can be installed using the disc provided with your machine or downloaded from the Xerox website www.xerox.com. To install the driver use the *Add Printer Wizard* provided by the operating system.

The Xerox printer driver allows users to customize the features of print queues installed using the driver. When bi-directional communication does not function, or when SNMP is disabled in an environment, you can modify the default configuration of the print queue.

Downloading the Xerox Printer Driver

To download the Xerox printer drivers:

1. Using a web browser, go to www.xerox.com.
2. Click **Support & Drivers**.
3. Identify your product.
4. Click **Drivers and Downloads** under the printer model.
5. Choose the operating system and language, then click **Go**. The available driver options are updated.
6. From the list of drivers, click the appropriate driver to download.
7. Read the *End-User License Agreement* and click **Accept**.
8. Save the driver and note the location where it is saved.

Using the Add Printer Wizard

Windows XP

1. Double-click the **.exe** file to open the *Xerox Print Driver* dialog box.
2. Click **Install**. The driver will extract.
3. The **Add Printer Wizard** dialog box appears. Click **Next**.
4. The **Local or Network Printer** dialog box appears. Select **Local Printer > Next**.
5. The **Select a Printer Port** dialog box appears. Select **Create a new port > Standard TCP/IP Port > Next**.
6. The *Add Standard TCP/IP Printer Port Wizard* dialog box appears. Click **Next**.
7. The *Add Port* screen appears. Type the printer name or IP address. Click **Next**.

Note If you enter an invalid IP address or device discover fails, the *Select Printer Configuration* dialog appears and enables you to choose the correct driver to install from the list of supported printers. To connect to a printer on an IPv6 network, the IPv6 protocol must be installed on your computer. By default, Microsoft does not support printing over IPv6 on Windows XP.

8. Click **Finish**. The wizard closes.
9. Select **Have Disk** from the *Manufacturer/Printers* window.
10. Click **Browse** and select the **.inf** file for your printer.

11. Click **Open > OK**.
12. Select the printer from the list. Click **Next**.
13. Type the printer name and select if you want to use the printer as the default printer. Click **Next**.
14. Select if you want to share the printer. Click **Next**.
15. Select if you want to print a test page. Click **Next**.
16. Click **Finish**.

Windows Vista

1. Double-click the **.exe** file to open the *Xerox Print Driver* dialog box.
2. Click **Run** at the *Security Warning*.
3. Click **Install**. The driver will extract and the *Choose a local or network printer* dialog box appears.
4. Choose **Add a local printer**. The *Choose a printer port dialog* box appears.
5. Select **Create a new port > Standard TCP/IP Port > Next**.
6. The *Type a printer hostname or IP address* dialog box appears. Choose **TCP/IP Device** from the **Device type** drop down menu.
7. Type the hostname or IP address. Clear the **Query the printer** checkbox. Click **Next**.
8. If you receive the **Additional Port Information Required** box, click **Next**.
9. Select **Have Disk** from the *Manufacturer/Printers* window.
10. Click **Browse** and select the **.inf** file for your printer.
11. Click **Open > OK**.
12. Select the printer from the list. Click **Next**.
13. Type the printer name and select if you want to use the printer as the default printer. Click **Next**.
14. Select if you want to share the printer. Click **Next**.
15. Select if you want to print a test page. Click **Next**.
16. Click **Finish**.

Windows 7

1. Click **Start > Devices and Printers**.
2. Select **Add a Printer**.
3. Select **Add a local printer**. The *Choose a printer port dialog* box appears.
4. Select **Create a new port > Standard TCP/IP Port > Next**. The *Type a printer hostname or IP address* dialog box appears.
5. Choose **TCP/IP Device** in the *Device type* menu.
6. Enter the hostname or IP address.
7. Clear the **Query the printer** checkbox. Select **Next**.
8. If you receive the *Additional Port Information Required* box, select **Next**.
9. Select **Have Disk** from the *Manufacturer/Printers* window.
10. Select **Browse** and select the printer's **.inf** file.
11. Select **Open > OK**.
12. Select the printer from the list. Select **Next**.

13. Enter the printer name.
14. Select if you want to use the printer as the default printer. Click **Next**.
15. Select if you want to print a test page. Click **Next**.
16. Select **Finish**.

Uninstalling

To uninstall the Xerox printer driver:

1. Using the appropriate path for your operating system, locate the list of printers:
 - Windows XP: **Start > Printers and Faxes**
 - Windows Vista/Windows 7: **Start > Control Panel > Hardware and Sound > Printers**The *Printers* or *Printers and Faxes* or *Devices and Printers* window appears.
2. Right-click on the icon for the printer you want to delete and select **Delete** or **Remove Device**. A confirmation message appears.
3. Click **Yes** to delete the printer driver.
4. Repeat these steps for all printer objects that use the driver that is being uninstalled.

For Windows XP Only

1. Right-click in the blank area of the folder or choose **File**. A menu opens.
2. Select **Server Properties**. A *Print Server Properties* dialog box appears.
3. Select the **Drivers** tab.
4. Select the printer driver to delete.
5. Click the **Remove** button. The printer driver is deleted.
6. Reboot the workstation.

Loading Paper

Paper Tray 1 (Bypass Tray) and Paper Tray 2 are provided as standard on all configurations. Additional paper trays can be purchased as an option. Up to 6 paper trays or up to 4 paper trays and a High Capacity Feeder can be installed.

Paper Tray 1 (Bypass Tray)

1. Lower Paper Tray 1 (Bypass Tray), located on the front of the machine and unfold the paper support extension.

Note Remove any curl on postcards and labels before loading them into Paper Tray 1 (Bypass Tray).

2. Prepare a stack of paper for loading by flexing or fanning them back and forth. Straighten the edges on a level surface.

Note Paper Tray 1 (Bypass Tray) can hold a maximum of 100 sheets of 20 lb (80 g/m²) bond paper, 20 transparency sheets or 10 envelopes.



3. Load the print material with the print side facing up and against the right edge of the tray.

4. Adjust the paper guide to the width of the stack of print material. Ensure you have not loaded too much print media. The stack should be under the *Maximum Fill* line.

5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.

For instructions, refer to [Tray Paper Settings](#) on page 61.

6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

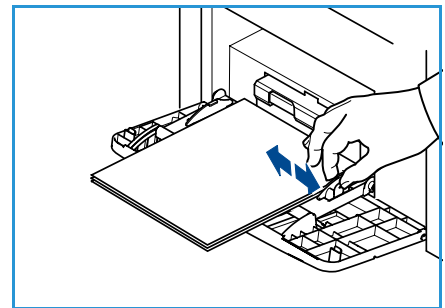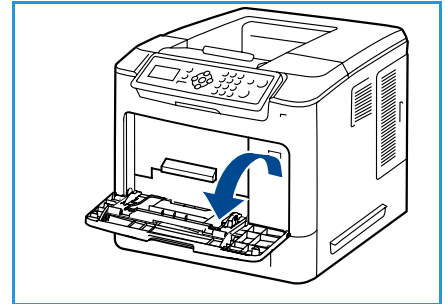


If the paper does not feed well while printing, push the paper in manually until it starts feeding automatically.

For more information on loading paper, refer to [Loading Paper](#) on page 56.

Paper Tray 2 and Paper Trays 3, 4, 5 and 6 (optional)


1. Open the paper tray.

The paper level indicator on the front of the tray shows the amount of paper currently left in the tray. When the tray is empty, the indicator of the bar is completely lowered.

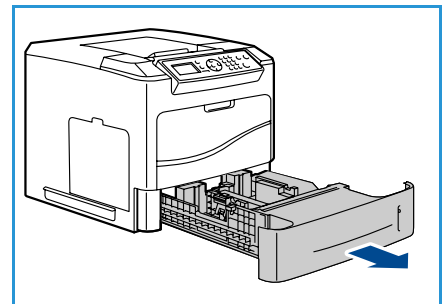

2. Fan the paper and insert it into the tray. Do not fill above the **Maximum Fill Line**.


Note Paper Trays 2, 3, 4, 5 and 6 can hold a maximum of 520 sheets of 20 lb (80 g/m²) bond paper or 50 envelopes in Paper Tray 2.

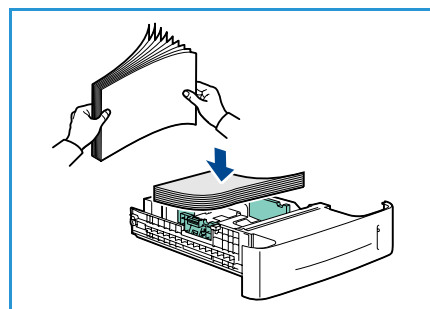

3. Squeeze the rear and side guides and move from the current position and into the correct position for the current paper size. Make sure the guides click into place.
4. Close the paper tray.
5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.

For instructions, refer to [Tray Paper Settings](#) on page 61.


6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

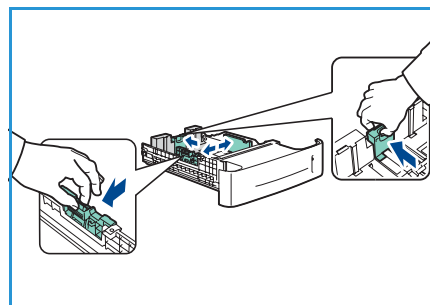


For more information on loading paper, refer to [Loading Paper](#) on page 56.

High Capacity Feeder (optional)

1. Opening the tray door automatically lowers an elevator in the base of the tray.

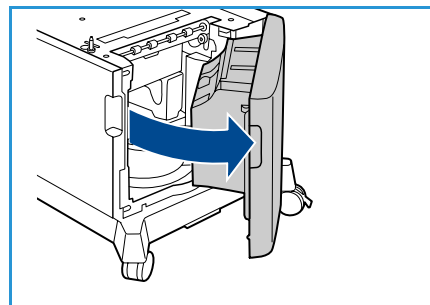

2. Squeeze the guide and move from the current position into the correct position for the paper being loaded. Make sure the guide clicks into place.
3. Place the media in the tray.
Paper must not be loaded above the *Maximum Fill line*.
4. Close the tray door. When the door is closed the elevator rises to feed the media.

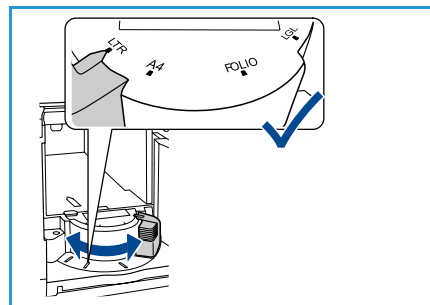

5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.
For instructions, refer to [Tray Paper Settings](#) on page 61.
6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

For more information on loading paper, refer to [Loading Paper](#) on page 56.

Menu Options

The **Menu** button provides access to information about the machine and the machine setups. After your machine is installed, it is recommended that the settings and options are customized to fully meet the requirements of the Users. Discuss your requirements with your System or Machine Administrator to ensure you get optimum performance from your machine.



The *Menu* options include:

- Jobs
- Information
- Tray Management
- Tray Paper Settings
- Tools
- Troubleshooting

Press the machine **Menu** button on the control panel to access the options. When using the menu options the following symbols can be displayed:

- The print icon appears before the titles of pages that can be printed. When the page is highlighted on the control panel, press the **OK** button and then highlight **Yes** to print that page.
- The lock icon appears before the titles of options that require the administrator password.



Jobs

Use to check the progress of active jobs, or display detailed information about completed jobs. The following options are available:

Option	Description
Active Jobs	Use to display a list of all the jobs currently waiting to be processed and printed. To view details about an active job, select the job in the list.
Personal & Secure Jobs	<i>Personal & Secure Jobs</i> are held at the machine until selected for printing. A user can print or delete their personal & secure jobs that are stored on the machine. <i>Personal Jobs</i> allow users to temporarily store jobs until they are at the machine and are ready for print and collection. <i>Personal Jobs</i> are deleted from memory after printing. Note <i>Personal Jobs</i> are only available if the optional hard drive is installed. <i>Secure Print</i> can be used to print confidential or sensitive jobs. The <i>Secure Job</i> is held on the machine until a passcode is entered to release the job for printing.

Option	Description
Saved Jobs	<i>Saved Jobs</i> is a standard feature on machines which have been configured with the optional Hard Disk Drive. It enables you to retrieve jobs which have been stored on the machine using the printer driver.
Completed Jobs	This option displays the jobs which have been completed on the machine. Up to 50 jobs can be displayed. Information about the job is shown, for example the job owner and submission time.
Print from USB	This option enables you to print jobs directly from a USB Memory Device.

Information

Report	Description
Menu Map	Provides a print out that helps navigate the control panel menus.
About this Printer	This provides information about your machine setup, including the serial number, IP Address, and the machine name.
Information Pages	Prints information about the machine setup and usage, including the Configuration Report, Supplies Usage and available Fonts (PostScript and PCL). Select the report required and select OK , then select Yes at the Print? prompt. Use the Print All Above Reports option to print all the available information pages.
Sample Pages	Provides sample pages that demonstrate different printer functions.
Supplies Information	Provides status information about the life of the Toner, Drum, Staple and Fuser cartridges.
Billing Meters	This list shows the total number of impressions, black impressions and maintenance impressions which have been made on the machine. It also shows the total number of sheets and 2-sided sheets put through the machine.
Firmware Versions	Provides information about the machine's firmware.

Tray Management

Use the *Tray Management* options to set the machine defaults for managing paper and media.

Option	Description
Paper Source	Sets the paper tray to be used for print jobs. If the paper source is set to Auto , the printer automatically selects the paper source based on the requested size.
Load Paper Timeout	When a tray is opened and closed the Tray Information screen is displayed asking the user to confirm the size and type of the paper loaded in the tray. This feature enables the Administrator to set the length of time the Tray Information screen is displayed.
Inch/Metric Defaults	Enables you to set the machine to display measurements either in millimeters or inches.
Paper Size Substitution	Enables the machine to automatically substitute common US and metric paper sizes when printing.
Auto Tray Switching	This option enables the machine to switch between trays if both trays have the same size of paper and a tray becomes empty. If Auto Tray Switching and Tray Sequencing are enabled, the Sequence settings allow the user or administrator to specify the next tray to use if the current tray runs out of media. For setup instructions, refer to the System Administrator Guide .
Tray 1 (Bypass)	Use this option to set the Tray Mode and Tray Prompt options. Tray Mode sets the tray to: • Static: The paper size and type is specified by the user when loading the tray. • Permanent: The paper size and type is permanently set and cannot be changed by the user during paper loading. The paper type and size requested must be loaded. • Dynamic: The paper size and type are dictated by the print job being sent. The tray is selected using the printer driver. • Bypass: Allows a print job to start or continue by accepting any paper loaded into Tray 1 (Bypass), and print on that paper, regardless of what the print job specifies. Tray Prompt enables a prompt to change the tray settings when a tray is opened and closed.
Tray 2	
Tray 3	
Tray 4	
Tray 5	
Tray 6	

Tray Paper Settings

Use the Tray Paper Settings to set the size, type and color settings for each tray.

Option	Description
Tray 1 (Bypass) Paper	Select Use Current Setup if loading the same paper size, type and color as previously loaded. Select Change Setup and adjust the settings if loading a different paper size, type or color.
Tray 2 Paper	
Tray 3 - 6 Paper	

Tools

The settings on the machine can be setup using the **Tools** option on the machine, or by using CentreWare Internet Services. For further information about using the Tools option, refer to [Setups](#) on page 77. For information about the settings available in CentreWare Internet Services, refer to the [System Administrator Guide](#).

Troubleshooting

The Troubleshooting option provides information and reports which can help to identify or solve problems.

Option	Description
Error Messages	Prints a list of active error messages.
Last 40 Error Messages	Prints a list of the last 40 fault messages and when they occurred.
Call for Assistance	Prints a report containing information about the machine and the current faults. Status information for each of the Customer Replaceable Units and machine configuration information is also included.
Print All Above Reports	This option enables you to print all the troubleshooting reports.
Test Prints	This feature enables you to print test prints that will help you and the Xerox Support Center diagnose image quality problems. Each test pattern checks parts of the printing process.
Hexadecimal Mode	Prints a page showing each character received by the printer and it's hexadecimal code, instead of interpreting the characters as PCL or PS.

General Care and Consumables

There are several consumables on the machine that need replenishing or replacing, such as paper, staples, and Customer Replaceable Units. To place an order for Xerox consumables, please contact your local Xerox Representative giving your Company Name, product number and the machine serial number.

If SMart eSolutions is configured on your machine, the Supplies Assistant™ enables you to proactively manage toner and drum cartridge supplies for your machine, ensuring that you never run out. For more information, refer to [Supplies Assistant™](#) on page 69.

Supplies can also be ordered from www.xerox.com, refer to [Consumables](#) on page 68 for further information.

The machine serial number can be displayed by pressing the **Menu** button, then selecting **Information** and then **About this Printer**. For further information about locating the serial number, please refer to [Locating the Serial Number](#) on page 118.

Customer Replaceable Units

The Toner Cartridge, Waste Toner Bottle, Staple Cartridge, and SMart Kit Drum Cartridge are Customer Replaceable Units (CRUs) on the machine.

The machine will display a message when a CRU needs to be replaced. Only replace the unit when a message instructs you to do so or when instructed by a Xerox Representative. To replace a Customer Replaceable Unit, follow the instructions provided within this guide or with the consumable.

Cleaning Tasks

Performing regular cleaning activities ensures the machine is kept free of dust and debris. The machine covers, control panel and output areas should all be cleaned using a soft lint-free cloth, lightly dampened with water.

For further information on consumables replacement and maintenance tasks, refer to [General Care and Troubleshooting](#) on page 89.

Logging On and Off

The System Administrator may choose to enable certain local security and accounting features which require the users to enter a User ID, password or account number before using the machine.

1. If requested, enter your User ID and password or account number and press **OK**.
If Xerox Secure Access has been enabled, swipe your access card using the card reader device before entering your PIN.
2. Complete your job.
3. To Log Off, press the **Stop** button.

Contact your System Administrator for more information.

Further Assistance

For any additional help visit our customer website at www.xerox.com or contact the *Xerox Support Center* quoting the machine serial number.

Xerox Support Center

If a fault cannot be resolved by following the display instructions, check [Error Messages](#) on page 104. If the difficulty persists, contact the *Xerox Support Center*. The *Xerox Support Center* will want to know the nature of the problem, the machine serial number, the fault code (if any) plus the name and location of your company.

The machine serial number can be displayed by pressing the **Menu** button, then selecting **Information** and then **About this Printer**. For further information about locating the serial number, please refer to [Locating the Serial Number](#) on page 118.

Documentation

Most answers to your questions will be provided by the documentation that is supplied on CD with the Phaser 4600/4620. Alternatively you can access the documents from www.xerox.com/support.

- Quick Use Guide - contains information about installing the machine and initial setups.
- User Guide (this document) - contains instructions and information about all the features on the machine.
- System Administrator Guide - provides detailed instructions and information about connecting your machine to the network and installing optional features.

Print

2

The Xerox Phaser 4600/4620 printers produce high quality prints from electronic documents. You can access the printer from your PC by installing the appropriate printer driver. The following pages contain an overview of the printer driver options for the Phaser 4600/4620 machines.

- [Printer Drivers](#) on page 28
- [Printing using Windows](#) on page 29
- [Printing using Macintosh](#) on page 40
- [Printing using Linux](#) on page 42

Printer Drivers

To access special printing options, use a Xerox printer driver. Xerox provides drivers for a variety of page description languages and operating systems. The following printer drivers are available:

- **PCL6:** The Printer Command Language driver can be used for applications requiring PCL. This is the recommended printer driver.
Note Supported in all operating systems.
- **PCL5e:** The Printer Command Language driver can be used for applications requiring PCL.
- **Windows PostScript Driver:** The PostScript printer driver takes full advantage of your system's custom features.
- **Xerox Walk-Up Printing Driver (Windows and Macintosh):** This driver enables printing from a PC to any Xerox PostScript-enabled printer. This is especially helpful for mobile professionals who travel to multiple locations and need to print to different printers.
- **Mac OS X (version 10.3 and higher) Driver:** This driver enables printing from a Mac OS X (version 10.2 and higher) operating system.
- **UNIX Driver:** This driver enables printing from a UNIX operating system.

To access the many printer drivers which can be used with your machine, refer to the Drivers CD or download the latest versions from the Xerox website at www.xerox.com.

Once you have decided upon the most appropriate printer driver, install it on your workstation. For information about installing printer drivers, refer to [Printer Driver Installation](#) on page 13 or contact your System Administrator.

Note You can load more than one printer driver for the machine on your workstation. Then, when you send a job to print, you can choose the most appropriate printer driver for the job.

Printing using Windows

The following provides an overview of the print procedure and features available when printing using Windows.

Control Options

There are a number of options which appear on all of the printer driver screens:


Option	Description
OK	Saves all the new settings and closes the driver or dialog. These new settings remain in effect until changed or until the software application is closed and the printer driver options revert to the default settings.
Cancel	Closes the dialog and returns all settings in the tabs to the values that were in place before the dialog was opened. Any changes made are lost.
Help	Click Help in the bottom right of the printer driver screen or F1 on the PC keyboard for information on the displayed printer driver screen. If the tip of the mouse pointer is rested on top of a control, Microsoft Windows will display a brief Help Tip about that control. If the right mouse button selects a control, the <i>Help</i> system provides more detailed information.
Defaults	Resets the current tab and all its settings to the system default values. The action of this button applies only to the current tab. All other tabs remain unchanged.
Earth Smart Settings	Set 2-Sided Print as default: Prints double sided to save paper. Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing. Turn off Banner Pages by default: Turns off banner pages to reduce the amount of paper and toner used. Set 2-Up as my default layout: Prints two pages of content on each sheet to reduce the amount of paper and toner used. Set Sample Set as my default Job Type: Use this option to print one copy of each job to check prior to printing all the sets required. Set Draft Mode as my Print Quality: Reduces the print quality to save toner. Hide Earth Smart settings button: Enables you to remove the Earth Smart button from the printer driver screen.

Print Procedure


Documents can be printed from your PC using the printer drivers supplied. The printer driver must be loaded on each PC which uses the machine for printing.

Note If a local security or accounting feature is enabled, you may need an account before using the machine. To get an account or for more information, contact the System Administrator.

1. Click **Print** in your application.
2. From the **Printer: Name** drop-down menu, click on your machine.

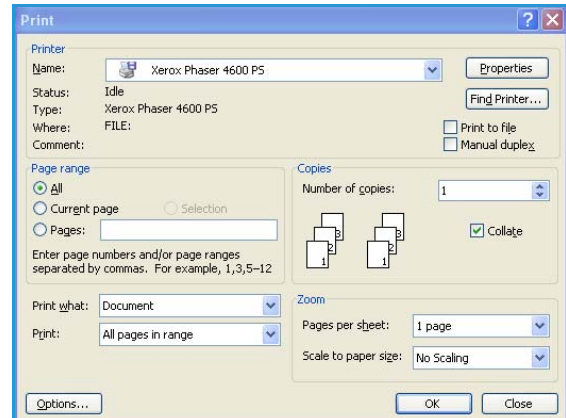


3. Click on **Properties** or **Preferences** to make your print selections. For information on the individual tabs, refer to the following:
 - [Paper/Output](#) on page 31
 - [Special Pages](#) on page 34
 - [Layout/Watermark](#) on page 37
 - [Advanced](#) on page 39
4. Click **OK** to confirm your selections.
5. Click **OK** to print your document.

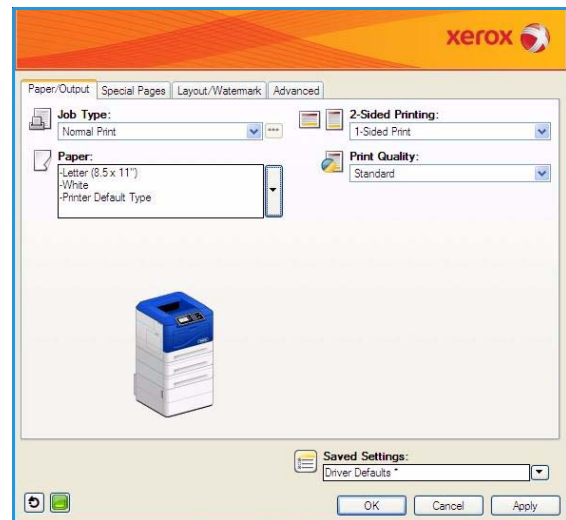

Paper/Output

Use the *Paper/Output* tab to select the basic printing requirements for your job. Identify the type of job being submitted, the paper, sides printed, finishing and quality requirements.

Note Some features are only supported by specific printer configurations, operating systems or driver types. You may see more features or options listed than your specific machine supports.

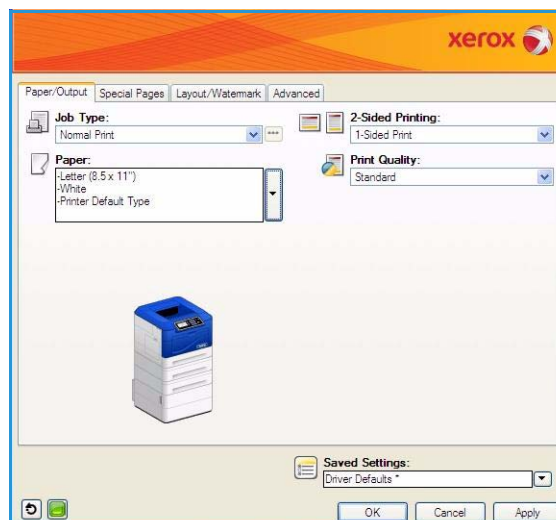


Job Type

Use this option to select the type of job being submitted to the printer. *Normal Print* and *Secure Print* job types are available on all configurations. The optional Hard Disk Drive must be installed for *Sample Set*, *Personal Print*, *Delay Print* and *Saved Job* job types.

- **Normal Print** prints the job immediately without requiring a passcode.
- **Secure Print** is used for confidential or sensitive jobs. The job is held at the machine until a passcode is entered to release the job for printing.

When you select this job type, the *Secure Print* screen is displayed for you to enter a unique passcode.

When the job arrives at the printer it is held in the job list until you release the job using the same passcode entered when the job was submitted.

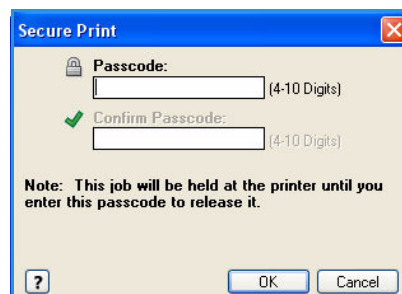


Note If multiple secure jobs are held in the list and require the same secure code, they will all be released for printing.

- **Sample Set** prints one copy of the job as a sample and holds the remaining copies in the job list at the printer.
Once you have checked the sample set you can release the remaining sets for printing or delete the job if no longer required.
- **Personal Print** enables you to hold all your jobs at the machine until you are ready to release and print them. The jobs can be released individually or together. After the job is submitted a folder will be automatically made for you. The name of the folder is your user name acquired from your PC. You can access and manage your jobs using CentreWare Internet Services and the machine control panel. For further information refer to [Personal & Secure Jobs](#) on page 47.

- **Delay Print** use this option to enter a specific time to print the job. This is useful for large jobs or if you want all your jobs to print at the same time. When you select this job type, the *Delay Print* screen is displayed.

Enter the time required and submit the job. The job remains in the job list until the specified time for printing.

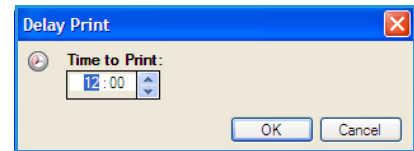

- **Saved Job** stores the job on the printer's hard drive so that it can then be printed on demand.

Job Name is used to enter a name for the job or select **Use Document Name** to use the file name of the document being submitted.

Select **Print and Save** to store and print the job, or leave unchecked to just store the job without printing.

Select **Public** for unsecure jobs or **Private** if a secure job is required and enter a passcode. The job can only be accessed and printed at the machine using the passcode entered here.

You can access and manage your jobs using CentreWare Internet Services and the machine control panel. For further information refer to [Saved Jobs](#) on page 48.




Paper

This option displays information about the paper to use for the print job, such as size and type.

To change the paper to use for printing, select the Paper drop-down menu. The options are:

- **Other Size** select this option to display the *Paper Size* screen. Select the paper size and scaling amount required.
- **Other Color** use this option to select a paper color for the print job. Select a color from the drop-down menu. Use **Automatically Select** to enable the printer to select a paper color.
- **Other Type** use this option to select a type of paper or media to use for the print job. Use **Automatically Select** to enable the printer to select a type.
- **Select by Tray** use this option to select a specific tray for printing the job. The printer only uses the paper in the selected tray, even when more than one tray contains the same paper size and type. Use **Automatically Select** to enable the printer to select a tray loaded with the size and type of paper selected for the job.

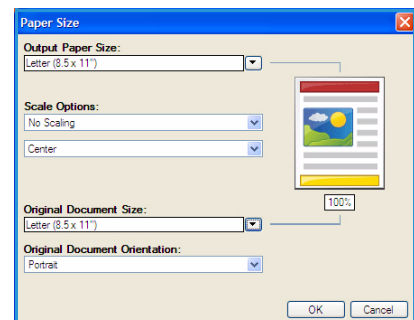


Advanced Paper Selection

Select this option to display the *Advanced Paper Selection* screen. If there is a bi-directional connection to the printer, the media loaded in each of the trays is shown.

Select the paper tray, size, color and type to use for printing.


Note For information about loading different media, refer to [Media Specifications](#) on page 62.

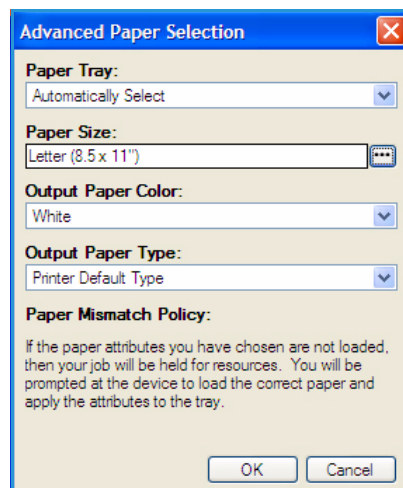

Transparency Separators

Select this option to display the *Transparency Separators* screen. If this option is selected, a blank or printed sheet is placed after each transparency. The paper type for your job must be set to **Transparency** using the **Other Type** menu option.

- Select **Blank Separators** or **Printed Separators** using the *Separator Options* drop-down menu.
- Select the *Separator Color*.

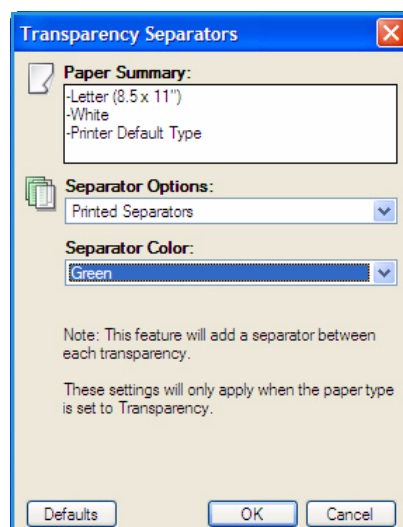

2-Sided Printing (optional)

You can have your job automatically printed on both sides of a sheet of paper if the duplex unit is installed.

Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.

- **1-Sided Print** prints on one side of the paper or transparency. Use this option when printing on transparencies, envelopes or labels.
- **2-Sided Print** prints on both sides of a sheet of paper. The images are printed so the job can be bound on the long edge of the sheet.
- **2-Sided Print, Flip on Short Edge** prints on both sides of a sheet of paper. The images are printed so the job can be bound on the short edge of the sheet.

Note Some media types, sizes, and weights cannot be automatically printed on both sides. Refer to www.xerox.com for specifications information.

Stapling (optional)


Use to select the stapling options for the print job if the optional finisher is installed.

- Select **1 Staple** to staple each set.
- Select **None** to switch off stapling.

Output Destination

Use to select the output location or a mailbox bin if the optional 4-Bin Mailbox is installed.

- Use **Automatically Select** to enable the machine to select an appropriate output tray for the job.
- Select **Main Tray** to print to the Output Tray.
- Select **Bin 1**, **Bin 2**, **Bin 3** or **Bin 4** to print to a mailbox bin.

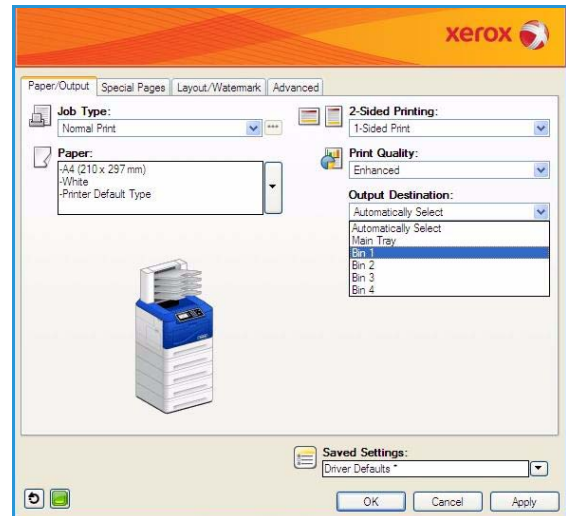


Special Pages

The *Special Pages* tab enables you to add, modify or delete cover pages, inserts or exception pages.

The table provides a summary of the special pages for your print job. Up to 250 inserts and exception pages can be included in the table. You can change the width of the columns in the table.

To edit, delete or move an entry in the table use the following buttons:

- **Edit** you can select single or multiple entries and use this button to change the properties for the selected entries.
- **Delete** is used to delete an individual entry or a selection of entries.
- **Delete All** is used to delete all the entries in the table.
- **Undo** is used to undo the last actions if you make an error.
- **Up** and **Down** are used to move the entries up or down in the table.

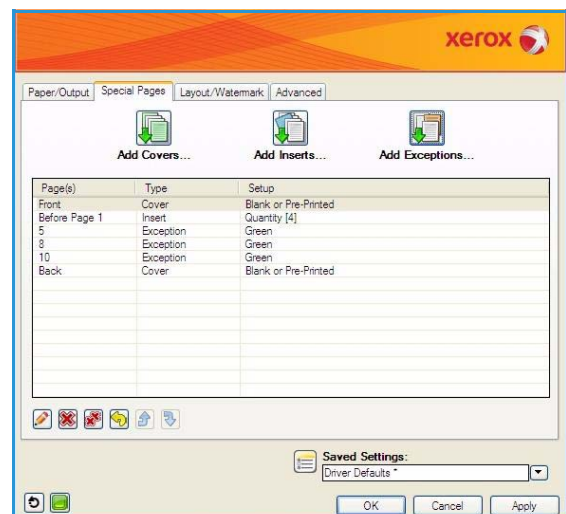


Some features are only supported by specific printer configurations, operating systems or driver types. You may see more features or options listed than your specific machine supports.

Add Covers

Use this option to add blank or printed covers to your printed document.

1. To add a cover select the **Add Covers** button above the table.
 2. Select the *Cover Options* required:
 - **Front Only** provides a front cover.
 - **Back Only** provides a back cover.
 - **Front and Back: Same** provides a front and back cover with the same settings, on the same media.
 - **Front and Back: Different** provides a front and back cover with individual programming requirements and on different media if required.
 3. Select the *Paper Settings* for the selected cover options.
 4. Select the printing options:
 - **Blank or Preprinted** inserts a blank or pre-printed sheet and does not print an image.
 - **Printed** uses the first page of the document to print the front cover (if selected), and the last page to print the back cover (if selected).
 5. Select **OK** to save your selections and exit.
- The cover details display in the table.

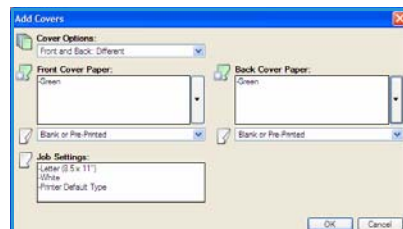

Add Inserts


Use this option to add blank or pre-printed inserts to your printed document. To program the inserts, you enter the page number of the page before the insert. If an insert is required as your first page, **Before Page 1** can be specified. It is recommended that you work through your document and identify the page numbers where inserts are required prior to programming.

To add an insert select the **Add Inserts** button above the table.

1. Using the *Inserts Options* drop-down menu, select whether the insert is to be placed **Before Page 1** or select **After Page(s)** to place inserts after the specified page numbers.

Note To add an insert to the front of your document, use the **Before Page 1** option.

2. Select the number of insert sheets required.
 3. Specify the page number before each insert. If multiple inserts are required it is recommended you enter all the page numbers, separated by a comma or enter a page range separated by a dash.
 4. Select the *Paper* requirements for the inserts and select **OK**.
- All the inserts programed display in the table.

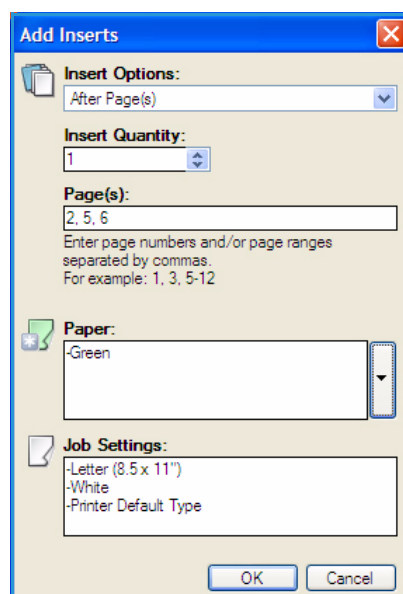

5. If any inserts have individual programming, such as a different paper color or a different number of inserts, select the entry required and use the **Edit** button to change the programming.

Add Exceptions

Use this option to specify the characteristics of any pages in the print job that differ from the settings used for the majority of the job. For example, your print job may contain 30 pages that print on standard size paper and two pages that print on a different size of paper. Use this option to indicate these two exception pages and select the alternate paper size to use.

To add *Exceptions* select the **Add Exceptions** button above the table.

1. Enter the page number the exception programming applies to. If multiple exceptions are required it is recommended you enter all the page numbers, separated by a comma or enter a page range separated by a dash.


If individual programming is required for some of the exceptions, the entry can be edited from the table.

2. Select the *Paper* requirements for the exceptions and select **OK**.

If **Use Job Setting** is displayed, the same paper as the main job is used.

3. Select the *2-Sided Printing* requirements for the exceptions:
 - **Use Job Setting** uses the same programming applied to the main job.
 - **1-Sided Print** prints the exception pages on one side only.
 - **2-Sided Print** prints the exception pages on both sides of the sheet of paper with the images printed so the job can be bound along the long edge of the sheet.
 - **2-Sided Print, Flip on Short Edge** prints the exception pages on both sides of the sheet of paper with the images printed so the job can be bound along the short edge of the sheet.

Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.

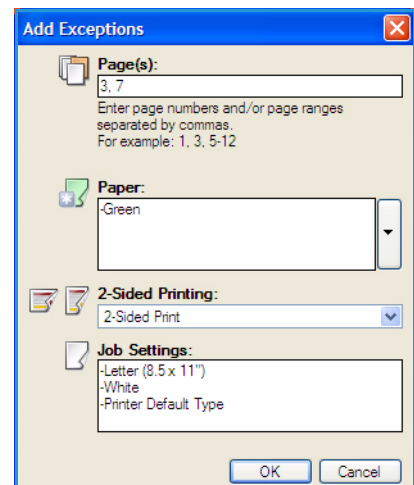


Job Settings displays the paper requirements specified for the main job.

4. Select **OK** to save your selections and exit.
All the exceptions programmed display in the table.
5. If any exceptions pages require individual programming, such as a different paper color or a different number of inserts, select the entry and use the **Edit** button to change the programming.

Layout/Watermark

The *Layout/Watermark* tab contains settings for selecting page layout, booklet layout and watermark options.

Some features are only supported by specific printer configurations, operating systems or driver types. You may see more features or options listed than your specific machine supports.

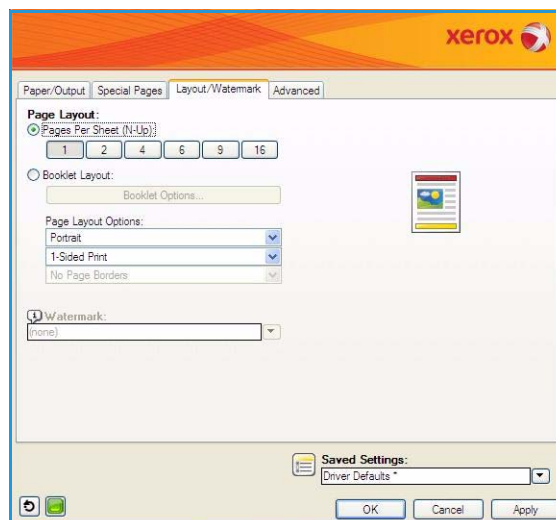

Page Layout


Pages Per Sheet (N-Up)

Select this option to print 1, 2, 4, 6, 9 or 16 pages on each side of a sheet of paper. Selecting multiple pages per sheet saves paper and is useful when you want to review the layout of the document.

Booklet Layout

Select this menu item to display the *Booklet Options* screen to select booklet paper size and margin options.

- **Booklet Paper Size**
 - Use **Automatically Select** to enable the printer to select the paper size for the job.
 - To select a paper size for the job, deselect the checkbox and use the drop-down menu.

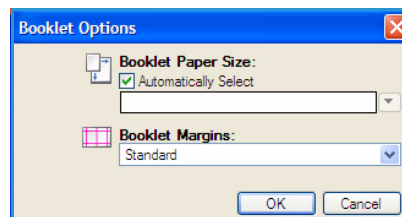

- **Booklet Margins**

Booklet Margins control whether the *Booklet Layout* feature fits the virtual pages into the printable area of the sheet, or into the full physical size of the sheet.

- **Standard** ensures the entire image fits on two pages per sheet, even if the original document has little or no white space around the edges.
- **None** assumes the original document has enough white space around all the borders to fit two pages per sheet.

Page Layout Options

If the orientation is not already set in your application, select the orientation from the first drop-down menu.

- **Portrait** prints the text and images across the shortest dimension of the paper.

- **Landscape** prints the text and images across the longest dimension of the paper.

Select the sides printed option required from the second drop-down menu.

- **1-Sided Print** prints on one side of the paper or transparency. Use this option when printing on transparencies, envelopes or labels.
- **2-Sided Print** prints on both sides of a sheet of paper with the images printed so the job can be bound on the long edge of the sheet.
- **2-Sided Print, Flip on Short Edge** prints on both sides of a sheet of paper with the images printed so the job can be bound on the short edge of the sheet.

Notes

- For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.
- You can also select these options on the *Paper/Output* tab for 2-Sided Printing.

If you select multiple pages per sheet for *Pages Per Sheet* or *Booklet Layout* select one of the following options from the third drop-down menu.

- **No Page Borders** does not print a border around each page.
- **Draw Page Borders** prints a border around each page.

Watermark


A watermark is a picture or text (independent of that provided by the application) that is printed on every page or the first page of the job.

The watermark options are provided in the drop-down menu. There are pre-set watermarks listed available, **Draft**, **Confidential** and **Copy**.

Once a watermark is selected, use the *Options* menu to select whether to print the watermark in the background, in the foreground or blend with the job. Also select whether to print the watermark on all pages or on the first page only.

Additional watermarks can be created using the **New** option. The *Watermark Editor* screen is displayed with options for creating a new watermark.

- **Name** is used to enter a name for the watermark. The name appears in the watermark selection menu under the *Layout/Watermark* tab. When creating a new watermark, type a name that is no more than 255 characters.
- The **Options** pull down menu allows you to choose the type of watermark to create. Select one of the following options:
 - **Text** uses the characters that you type in the *Text* field. This is displayed in the document as the watermark.
 - **Time Stamp** uses a time stamp as the watermark. Select whether to include the weekday, date, time, and/or time zone in the **Time Stamp Format** drop-down list.
 - **Picture** uses a picture as the watermark. The picture can be in Bitmap, GIF or JPG format. Specify the file name in the *File Name* field or select the *Choose File* button to browse to the picture that you want to use.

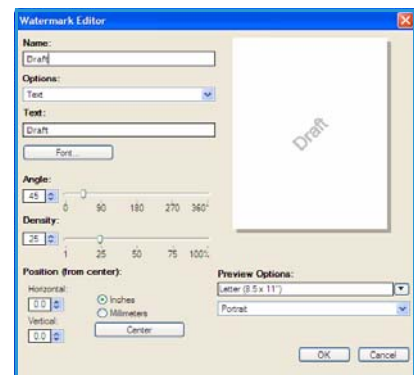

- **Font** if you selected **Text** or **Time Stamp**, select this option to access the *Font* screen to change the font family, style, and size to use for the text.
- **Angle** if you selected **Text** or **Time Stamp**, either specify an angle or move the slider to select the angle of the text on the page. The default angle is 45 degrees.
- **Scale** if you selected **Picture**, either specify the percentage or move the slider to select the percentage to scale the picture.
- **Density** either specify a density for the watermark or move the slider to select the density. The default density is 25 percent.
- Use **Position (from center)** to select the number of inches or millimeters to shift the watermark from the center of the page or select the **Center** option to center the watermark.
- **Preview Options** selects the paper size and orientation to use for the preview image of the watermark.


Use the **Edit** option to change an existing watermark. To delete the selected watermark, select **Delete** from the drop-down menu.

Note Not all applications support watermark printing.

Advanced

The *Advanced* tab enables you to select advanced printing options that are rarely changed.

Note Some features are only supported by specific printer configurations, operating systems or driver types. You may see more features or options listed than your specific machine supports.

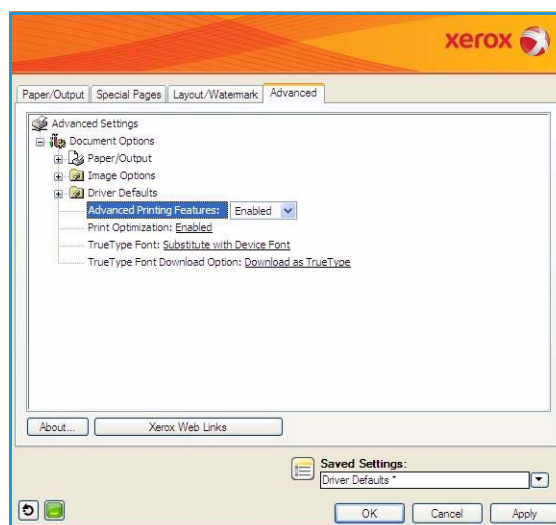

Printing using Macintosh

This section explains how to print using Macintosh. You need to set the print environment before printing. Refer to the [System Administrator Guide](#).

Printing a Document

When you print with a Macintosh, you need to check the printer driver setting in each application you use. Follow the steps below to print from a Macintosh:

1. Open the document you want to print.
2. Open the **File** menu and click **Page Setup (Document Setup** in some applications).
3. Choose your paper size, orientation, scaling, other options, and make sure that your machine is selected. Click **OK**.
4. Open the **File** menu and click **Print**.
5. Choose the number of copies you want and indicate which pages you want to print.
6. Click **Print**.

Changing Printer Settings

You can use advanced printing features provided by your machine.

Open an application and select **Print** from the **File** menu. The machine name, which appears in the printer properties window may differ depending on the machine in use. Except for the name, the composition of the printer properties window is similar to the following.

Note The setting options may differ depending on printers and Macintosh OS version.

Select the options required using the tabs and drop-down menus.

Layout

The *Layout* tab provides options to adjust how the document appears on the printed page. You can print multiple pages on one sheet of paper. This feature provides a cost-effective way to print draft pages.

- **Pages per Sheet:** Select the number of pages you want to print on one sheet of paper.

Paper

Set **Paper Feed** to correspond to the paper loaded in the tray from which you want to print. This will let you get the best quality printout. If you load a different type of print material, select the corresponding paper type.

Xerox Features

The **Xerox Features** tab provides the following options:

Graphics

Use the Graphics option to enhance the quality of your output. Select **Graphics** from the drop-down list under **Orientation** to access the graphic features. The **Resolution** option allows you to select the printing resolution. The higher the setting, the sharper the clarity of printed characters and graphics. The higher setting also may increase the time it takes to print a document.

Toner Save Mode

Selecting this option extends the life of your Toner Cartridge and reduces your cost per page without a significant reduction in print quality.

- **Printer Setting:** Select this option to use the settings made on the control panel of the printer.
- **On:** Select this option to allow the printer to use less toner on each page.
- **Off:** If you do not need to save toner when printing a document, select this option.

Two Sided Printing (optional)

You can print on both sides of the paper if the duplex unit is installed. Before printing in the duplex mode, decide on which edge you will be binding your finished document.

Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.

The binding options are as follows:

- **Long-Edge Binding:** This option is the conventional layout used in book binding.
- **Short-Edge Binding:** This option is the type often used with calendars.
- **Reverse Duplex Printing:** The document is printed 2-sided and the second side images are rotated 180 degrees.
- **Fit to Page:** This option allows you to scale your print job to any selected paper size regardless of the document size. This can be useful when you want to check fine details on a small document.

Printing using Linux

Printing from Applications

There are a lot of Linux applications that allow you to print using Common UNIX Printing System (CUPS). You can print on your machine from any such application.

1. Open an application, and select **Print** from the **File** menu
2. Select **Print** directly using **lpr**.
3. In the LPR GUI window, select the machine from the printer list and click **Properties**.
4. Change the print job properties using the following four tabs displayed at the top of the window.
 - **General:** This option allows you to change the paper size, the paper type, and the orientation of the documents. It enables the duplex feature, adds start and end banners, and changes the number of pages per sheet.

Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.

- **Text:** This option allows you to specify the page margins and set the text options, such as spacing or columns.
 - **Graphics:** This option allows you to set image options that are used when printing image files, such as color options, image size or image position.
 - **Machine:** This option allows you to set the print resolution, paper source, and destination.
5. Click **Apply** to apply the changes and close the **Properties** window.
 6. Click **OK** in the **LPR GUI** window to start printing.

The *Printing* window appears, allowing you to monitor the status of your print job.

Printing Files

You can print many different types of files on your machine using the standard CUPS method, directly from the command line interface. The drivers package replaces the standard **lpr** tool with a much more user-friendly LPR GUI program.

To print any document file:

1. Type **lpr <file_name>** from the Linux shell command line and press **Enter**. The **LPR GUI** window appears.
2. When you type only **lpr** and press **Enter**, the **Select file(s) to print** window appears first. Just select any files you want to print and click **Open**.
3. In the **LPR GUI** window, select your machine from the list, and change the print job properties.
4. Click **OK** to start printing.

Configuring Printer Properties

Using the **Printer Properties** window provided by the **Printers configuration**, you can change the various properties for your machine as a printer.

1. Open the **Unified Driver Configurator**.

If necessary, switch to **Printers configuration**.

2. Select your machine on the available printers list and click **Properties**.

3. The **Printer Properties** window opens.

The following five tabs display at the top of the window:

- **General:** This option allows you to change the printer location and name. The name entered in this tab displays on the printer list in **Printers configuration**.
- **Connection:** This option allows you to view or select another port. If you change the machine port from USB to parallel or vice versa while in use, you must re-configure the machine port in this tab.
- **Driver:** This option allows you to view or select another machine driver. By clicking **Options**, you can set the default machine options.
- **Jobs:** This option shows the list of Print jobs. Click **Cancel job** to cancel the selected job and select the **Show completed jobs** check box to see previous jobs on the job list.
- **Classes:** This option shows the class that your machine is in. Click **Add to Class** to add your machine to a specific class or click **Remove from Class** to remove the machine from the selected class.

4. Click **OK** to apply the changes and close the **Printer Properties** window.

Jobs

3

The Jobs option enables you to manage active jobs, view information about completed jobs, access personal & secure jobs, and print jobs which have been saved on the machine.

- [Active Jobs](#) on page 46
- [Personal & Secure Jobs](#) on page 47
- [Saved Jobs](#) on page 48
- [Completed Jobs](#) on page 50

Active Jobs

Use the *Active Jobs* option to display a list of all the jobs currently in the list waiting to be processed. To view details about an active job, select the job in the list.

To access the **Active Jobs** option:

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Jobs** option and press **OK**.
3. Press the up/down arrows to highlight the **Active Jobs** option and press **OK**.

A list of all the active jobs is displayed.

4. Select the Job required and press **OK**. The options available for each job are dependent on the status of the job:



Option	Description
Delete	Removes the selected job from the list. Any job can be deleted using the feature, regardless of the job originator. To delete the job, press the up/down arrows to highlight the Delete option and press OK , then press the left arrow to highlight Yes at the <i>Delete?</i> prompt and press OK .
Details	Displays information about the job. The job owner, job type, job status and time of submission is displayed.
Promote	Promote is used to move a job to the top of the list. It will be completed after the current job.
Required Resources	Displays the resources needed to complete the job. The Tray, Paper Size, Paper Type and Paper Color required is displayed. Once the resources are available, the job will print.
Release	Select this option to release a job for printing that is held in the job list. To release the job, press the up/down arrows to highlight the Release option and press OK .

5. Press the up/down arrows to highlight the options required and press **OK**.
6. Select further options as required and press **Stop** to exit the Menu.

Personal & Secure Jobs

Personal & Secure Jobs can be submitted using the printer driver and held at the machine until selected by a user for printing or deleting. You can also submit *Secure Jobs* using CentreWare Internet Services.

- **Personal Print** allows users to temporarily store jobs until they are at the machine and are ready for print and collection. This ensures the jobs are not left at the printer for long periods of time or collected by another user. *Personal Jobs* are deleted from memory after printing.

Note *Personal Jobs* are only available if the optional hard drive is installed.

- **Secure Print** can be used to print confidential or sensitive jobs. The *Secure Job* is held on the machine until a passcode is entered to release the job for printing.

The user can access and manage their jobs from CentreWare Internet Services and the machine control panel. For information about using CentreWare Internet Services, refer to [Personal & Secure Jobs](#) on page 71.

For information about submitting *Personal & Secure Jobs* using the printer driver, refer to [Print Procedure](#) on page 30.

Printing Personal & Secure Jobs

To access the **Personal & Secure Jobs** option at the machine:

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Jobs** option and press **OK**.
3. Press the up/down arrows to highlight the **Personal & Secure Jobs** option and press **OK**.
4. Press the up/down arrows to highlight your User Name and press **OK**.



5. If you only have *Personal Print* jobs to release, a list of your jobs is displayed.

If you have *Secure Print* jobs to release, enter your passcode using the keypad and press **OK**. The passcode must match the passcode entered when the job was submitted for printing.

If you have both *Secure Print* and *Personal Print* jobs to release but only want to access the *Personal Print* jobs at this time, select **Skip Passcode** and press **OK**.

6. Select the option required for your jobs:
 - To print all your jobs, select **Print All** and press **OK**. At the **Print All?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To delete all your jobs, select **Delete All** and press **OK**. At the **Delete All?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To print an individual job, select the job required and select **Print**. Press **OK**. At the **Print?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To delete an individual job, select the job and select **Delete**. Press **OK**. At the **Delete Job?** prompt, use the left arrow to select **Yes** and press **OK**.
7. Press **Stop** to return to Ready mode.

Saved Jobs

Saved Jobs is a standard feature on machines which have been configured with the optional Hard Disk Drive. It enables you to retrieve jobs which have been stored on the machine using the printer driver. Prior to using the *Saved Jobs* option, a job must be saved to a folder on the machine. For instructions, refer to [Saving a Job](#) on page 49.

Jobs are placed into a folder located on the machine and can be accessed and retrieved for printing at a later date. Jobs can be recalled and printed as many times as you need. The user can access and manage their jobs from CentreWare Internet Services and the machine control panel. For information about using CentreWare Internet Services, refer to [Saved Jobs](#) on page 48.

Printing a Saved Job

To access the *Saved Jobs* option:

1. Press the **Menu** button on the control panel.
 2. Press the up/down arrows to highlight the **Jobs** option and press **OK**.
 3. Press the up/down arrows to highlight the **Saved Jobs** option and press **OK**.
A list of available folders is displayed.
 4. Select the folder required and press **OK**.
 5. If a *User Folder* is selected, enter the passcode using the keypad and press **OK**. The jobs in the folder are displayed.
 - To print all the folder jobs, select **Print All** and press **OK**. At the **Print All?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To delete all the folder jobs, select **Delete All** and press **OK**. At the **Delete All?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To print an individual job, select the job required and select **Print**. Press **OK**. At the **Print?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To delete an individual job, select the job and select **Delete**. Press **OK**. At the **Delete Job?** prompt, use the left arrow to select **Yes** and press **OK**.
- If a *Public Folder* is selected, the jobs in the folder are displayed.
- To print an individual job, select the job required and select **Print**. Press **OK**. At the **Print?** prompt, use the left arrow to select **Yes** and press **OK**.
 - To delete an individual job, select the job and select **Delete**. Press **OK**. At the **Delete Job?** prompt, use the left arrow to select **Yes** and press **OK**.




Saving a Job

Prior to using the *Saved Jobs* option, a job must be saved to a folder on the machine. Jobs can be saved using the printer driver.

To store a job using the printer driver:

1. Open your document and select **Print** from the application *File* menu. The application *Print* window is displayed.
2. Select the *Xerox Phaser 4600/4620* printer from the *Printer Name* drop-down menu.
3. Select **Properties** to access the print settings for the job.
4. Select the *Job Type* drop-down menu and select **Saved Job**.

The *Saved Job* options are displayed.

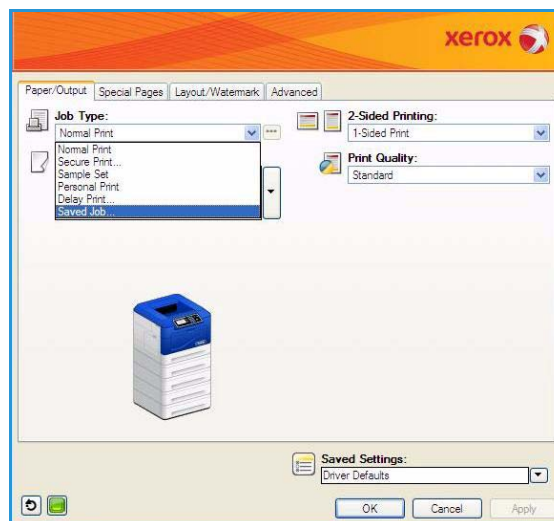

5. Program the *Saved Job* options as required:
 - **Job Name** is used to enter a name for the job or select **Use Document Name** to use the file name of the document being submitted.
 - Select **Print and Save** to store and print the job, or leave unchecked to just store the job without printing.
 - Select **Public** for unsecure jobs or **Private** if a secure job is required and enter a passcode. The job can only be accessed and printed at the machine using the passcode entered here.
6. Select **OK** to save the settings and exit the *Saved Job* options. Program the print features required for the saved job.
7. Select **OK** to save the print settings.
8. Select **OK** on the *Print* dialogue window to send the job.



The job is processed and sent to the machine for saving or saving and printing, depending on the selection.

Completed Jobs

This option displays the jobs which have been completed on the machine. Up to 50 jobs can be displayed. Information about the job is shown, for example the job owner and submission time.

To access the **Completed Jobs** option:

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Jobs** option and press **OK**.
3. Press the up/down arrows to highlight the **Completed Jobs** option and press **OK**.

A list of all the completed jobs is displayed.

4. Select the Job required and press **OK**. The following information is available for each job:
 - Owner
 - Type
 - Status
 - Image Overwrite
 - No. of Images
 - Output Sheets
 - Submitted
 - Completed
5. Press **Stop** to exit the Menu.



The completed jobs can also be displayed using CentreWare Internet Services, refer to [Jobs](#) on page 71 for instructions.

USB Flash Memory

4

USB memory devices are available with a variety of memory capacities to give you more room for storing documents. For information about setting up and enabling the USB Port, refer to the [System Administrator Guide](#).


- [Inserting the USB Memory Device](#) on page 52
- [Printing from USB Memory Device](#) on page 53

Inserting the USB Memory Device

Your machine supports USB memory devices with FAT16/FAT32 and sector size of 512 bytes.

1. Check your USB Memory Device is within specification.


- You must use only an authorized USB memory device with an A plug type connector.
- Use only an USB memory device with metal-shielded connector.

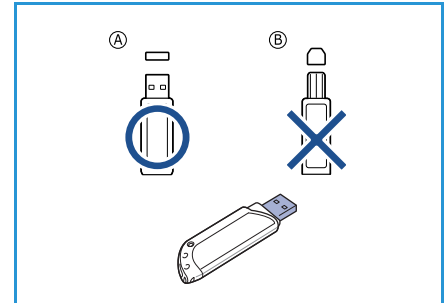

2. Insert the USB memory device into the USB memory port on your machine.



- Do not remove the USB memory device while it is in use.
- If your USB memory device has certain features, such as security settings and password settings, your machine may not automatically detect it. For details about these features, see your USB memory device User Guide.

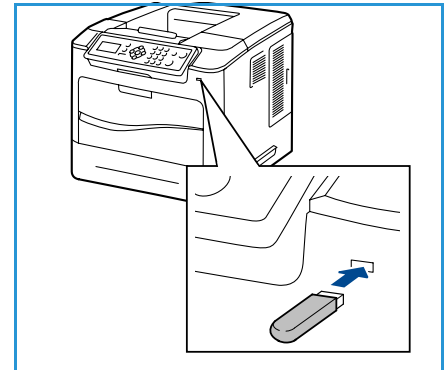


Printing from USB Memory Device

You can directly print files stored on a USB memory device. You can print the following supported file types:

- **PRN:** Only files created by the driver provided with your machine are recommended to print from a USB memory device. If you create PRN files using another machine, the printout may be different. PRN files can be created by selecting the **Print to file** check box when you print a document. The document will be saved as a PRN file, rather than printed on paper.
- **TIFF:** TIFF 6.0 Baseline.
- **JPEG:** JPEG Baseline.
- **PDF:** PDF 1.7 and below.
- **PCL:** A PCL file.
- **PS:** A PostScript file.
- **TXT:** A text file.

To print a document from a USB memory device:

1. Press the up/down arrows until **Print from USB** is highlighted and press **OK**. The **Print from USB** menu displays.
2. Press the up/down arrows to highlight the required folder and press **OK**.
3. Press the up/down arrows until the file you want highlights and press **OK**.
4. The **Quantity** menu displays. Press the up/down arrows to select the number of copies to be printed or enter the number. Press **OK**.
5. The **Print from Tray** menu is displayed, press the up/down arrows to highlight the required output tray and press **OK**.
After printing the file, the display asks if you want to print another job.
6. To print another document, press the left/right arrows to highlight **Yes** and press **OK**.
Otherwise, press the left/right arrows to highlight **No** and press **OK**.
7. Press **Stop** to return to ready mode.

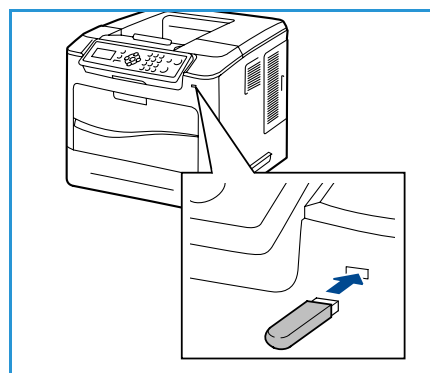

Paper and Other Media

5

In this chapter, you will learn about the different types of stock and stock sizes that can be used on your machine, available paper trays and the types of stock and sizes supported by each tray.

- [Loading Paper](#) on page 56
- [Tray Management and Settings](#) on page 59
- [Media Specifications](#) on page 62

Loading Paper

Paper Tray 1 (Bypass Tray) and Paper Tray 2 are provided as standard on all configurations. Additional paper trays can be purchased as an option. Up to 6 paper trays or up to 4 paper trays and a High Capacity Feeder can be installed.

Various media sizes and types can be used in the trays. For more media specifications, refer to [Media Specifications](#) on page 62.

Preparing Paper for Loading

Before loading paper into the paper trays, fan the edges. This procedure separates any sheets of paper that are stuck together and reduces the possibility of paper jams.

Note To avoid unnecessary paper jams and misfeeds do not remove paper from its packaging until required.

Paper Tray 1 (Bypass Tray)

Paper Tray 1 (Bypass Tray) is located on the front of your machine. It can be closed when not in use, making the product more compact. Use Paper Tray 1 (Bypass Tray) to print transparencies, labels, envelopes or postcards in addition to making quick runs of paper types or sizes that are not currently loaded in the paper tray.

Acceptable print media is plain paper from 3 x 5" to 8.5 x 14" Legal (76.2 x 127 mm to 216 x 356 mm) and weighing between 16 lb and 57 lb (60 g/m² and 216 g/m²). If loading envelopes, remove any curl on the envelopes before loading them. Prepare a stack of envelopes for loading by flexing or fanning them back and forth, a maximum of 10 envelopes can be loaded.

1. Lower Paper Tray 1 (Bypass Tray), located on the front of the machine and unfold the paper support extension.


Note Remove any curl on postcards and labels before loading them into Paper Tray 1 (Bypass Tray).

2. Prepare a stack of paper for loading by flexing or fanning them back and forth. Straighten the edges on a level surface.


Note Paper Tray 1 (Bypass Tray) can hold a maximum of 100 sheets of 20 lb (80 g/m²) bond paper, 20 transparency sheets or 10 envelopes.

3. Load the print material with the print side facing up and against the right edge of the tray.

Note Hold transparencies by the edges and avoid touching the print side.

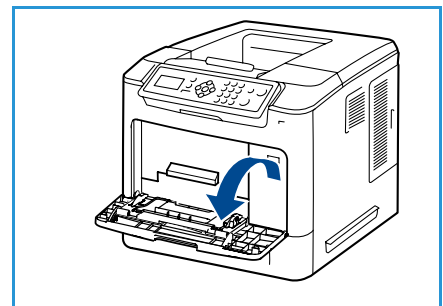

4. Adjust the paper guide to the width of the stack of print material. Ensure you have not loaded too much print media. The stack should be under the *Maximum Fill* line.
5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.
For instructions, refer to [Tray Paper Settings](#) on page 61.
6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

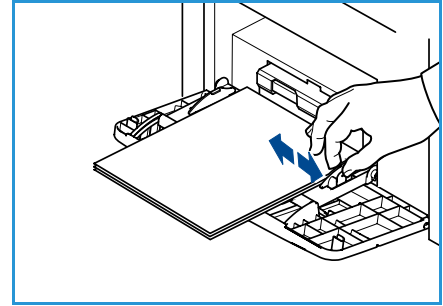

If the paper does not feed well while printing, push the paper in manually until it starts feeding automatically.

Paper Tray 2 and Paper Trays 3, 4, 5 and 6 (optional)


Acceptable print media for Paper Tray 2 is plain paper from 3.8 x 5.8" to 8.5 x 14" Legal (98.6 x 148.5 mm to 216 x 356 mm) and weighing between 16 lb and 43 lb (60 g/m² and 163 g/m²). Acceptable print media for Paper Trays 3, 4, 5 and 6 is plain paper from 3.8 x 7" to 8.5 x 14" Legal (98.6 x 177.8 mm to 216 x 356 mm) and weighing between 16 lb and 43 lb (60 g/m² and 163 g/m²).

Envelopes can be loaded in Paper Tray 2. If loading envelopes, remove any curl on the envelopes before loading them. Prepare a stack of envelopes for loading by flexing or fanning them back and forth, a maximum of 50 envelopes can be loaded.

For information about loading the High Capacity Feeder, refer to [High Capacity Feeder \(optional\)](#) on page 58.


1. Open the paper tray.

The paper level indicator on the front of the tray shows the amount of paper currently left in the tray. When the tray is empty, the indicator of the bar is completely lowered.

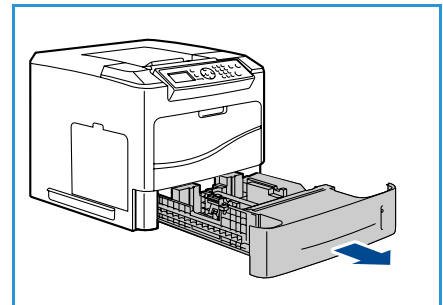

2. Fan the paper and insert it into the tray. Do not fill above the *Maximum Fill Line*.


Note Paper Trays 2, 3, 4, 5 and 6 can hold a maximum of 520 sheets of 20 lb (80 g/m²) bond paper or 50 envelopes in Paper Tray 2.

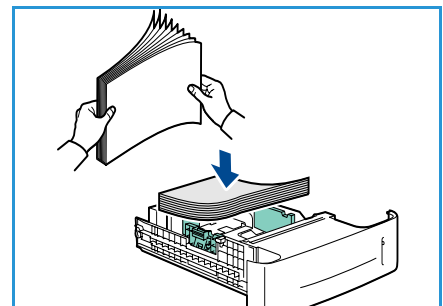

3. Squeeze the rear and side guides and move from the current position and into the correct position for the current paper size. Make sure the guides click into place.
4. Close the paper tray.
5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.

For instructions, refer to [Tray Paper Settings](#) on page 61.


6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

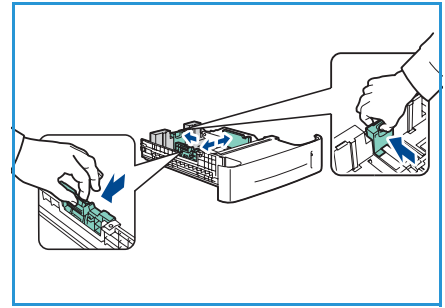

High Capacity Feeder (optional)

The optional High Capacity Feeder can hold up to 2000 sheets and is intended to be the primary feeder for the most commonly used media. Acceptable print media is plain paper from A4/Letter to Legal size (210 x 298 mm / 215 x 279 mm to 216 x 356 mm) and weighing between 16 lb and 43 lb (60 g/m² and 163 g/m²).

1. Opening the tray door automatically lowers an elevator in the base of the tray.

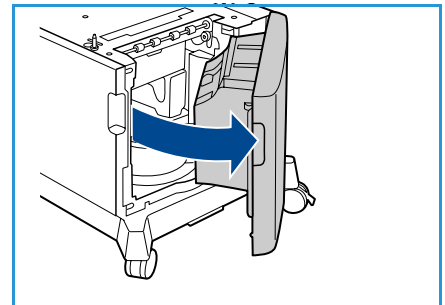


2. Squeeze the guide and move from the current position into the correct position for the paper being loaded. Make sure the guide clicks into place.

3. Place the media in the tray.

Paper must not be loaded above the *Maximum Fill* line.

Note The High Capacity Feeder can hold a maximum of 2000 sheets of 20 lb (80 g/m²) bond paper.

4. Close the tray door. When the door is closed the elevator rises to feed the media.
5. After loading paper in the paper tray, set the paper size, type and color using the control panel. Press **OK** to confirm the settings or **Stop** to change the settings.
For instructions, refer to [Tray Paper Settings](#) on page 61.
6. When printing from your PC, ensure you select the **Paper** button to specify the correct paper size, color and type. Not confirming the paper details may result in printing delays.

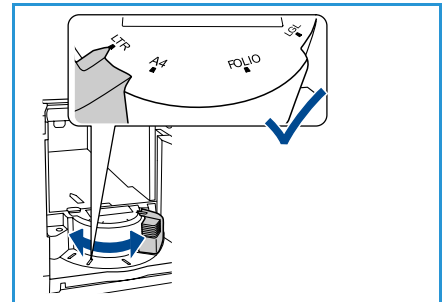

Tray Management and Settings

Tray Management Settings and *Tray Paper Settings* are used to configure the paper tray settings and media.

Tray Management Settings

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Tray Management** option. Press **OK**.



3. The following **Tray Management** settings are available:

Option	Description	Settings
Paper Source	Sets the paper tray to be used for print jobs. If the paper source is set to Auto , the printer automatically selects the paper source based on the requested size.	• Auto • Tray 1 (Bypass) • Tray 2 • Tray 3 • Tray 4 • Tray 5 • Tray 6
Load Paper Timeout	When a tray is opened and closed the <i>Tray Information</i> screen is displayed asking the user to confirm the size and type of the paper loaded in the tray. This feature enables the Administrator to set the length of time the <i>Tray Information</i> screen is displayed.	• None • 1 Min • 3 Min • 5 Min • 10 Min • 1 Hour • 24 Hours
Inch/Metric Defaults	Enables you to set the machine to display measurements either in millimeters or inches.	• Inches • Millimeters
Paper Size Substitution	Enables the machine to automatically substitute common US and metric paper sizes when printing.	• On • Off

Option	Description	Settings
Auto Tray Switching	This option enables the machine to switch between trays if both trays have the same size of paper and a tray becomes empty. If Auto Tray Switching and Tray Sequencing are enabled, the Sequence settings allow the user or administrator to specify the next tray to use if the current tray runs out of media. For setup instructions, refer to the System Administrator Guide.	- On - Off
Tray 1 (Bypass)	Use this option to set the Tray Mode and Tray Prompt options. Tray Mode sets the tray to: Static: The paper size and type is specified by the user when loading the tray. Permanent: The paper size and type is permanently set and cannot be changed by the user during paper loading. The paper type and size requested must be loaded. Dynamic: The paper size and type are dictated by the print job being sent. The tray is selected using the printer driver. Bypass: Allows a print job to start or continue by accepting any paper loaded into Tray 1 (Bypass), and print on that paper, regardless of what the print job specifies. Tray Prompt enables a prompt to change the tray settings when a tray is opened and closed.	- Tray Mode - Tray Prompt
Tray 2		- Tray Mode - Tray Prompt
Tray 3		- Tray Mode - Tray Prompt
Tray 4		- Tray Mode - Tray Prompt
Tray 5		- Tray Mode - Tray Prompt
Tray 6		- Tray Mode - Tray Prompt

Press the up/down arrows to highlight the option required and press **OK**.

- Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
- Continue customizing the **Tray Management** settings as required, then press **Stop** to return to ready mode.

Tray Paper Settings

After loading paper in the paper tray, set the paper size, type and color using the control panel. After closing the paper tray the paper size, type and color are automatically displayed. Using the settings displayed or the steps below, change the settings to match the Paper Size and Type of paper loaded.

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Tray Paper Settings** option. Press **OK**.



3. The following **Tray Paper Settings** are available:

Option	Description	Settings
Tray 1 (Bypass) Paper	Select Use Current Setup if loading the same paper size, type and color as previously loaded. Select Change Setup and adjust the settings if loading a different paper size, type or color.	• Use current Setup • Change Setup
Tray 2 Paper		• Use current Setup • Change Setup
Tray 3 - 6 Paper		• Use current Setup • Change Setup

Press the up/down arrows to highlight the option required and press **OK**.

4. Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
5. Continue customizing the **Tray Paper Settings** as required, then press **Stop** to return to ready mode.

If you want to use special sized paper, select a custom paper size in the printer driver. Refer to [Paper/Output](#) on page 31 for instructions.

Media Specifications

Media Guidelines

When selecting or loading paper, envelopes or other special media please adhere to these guidelines:

- Attempting to print on damp, curled, wrinkled or torn paper can cause paper jams and poor print quality.
- Use only high quality copier grade paper. Avoid paper with embossed lettering, perforations or texture that is too smooth or too rough.
- Store paper in its ream wrapper until ready to use. Place cartons on pallets or shelves, not on the floor. Do not place heavy objects on top of the paper, whether it is packaged or unpackaged. Keep it away from moisture or other conditions that can cause it to wrinkle or curl.
- During storage, moisture-proof wrap (any plastic container or bag) should be used to prevent dust and moisture from contaminating your paper.
- Always use paper and other media that conform with the specifications.
- Use only well-constructed envelopes with sharp, well creased folds:
 - DO NOT use envelopes with clasps and snaps.
 - DO NOT use envelopes with windows, coated lining, self-adhesive seals or other synthetic materials.
 - DO NOT use damaged or poorly made envelopes.
- Only use the special media recommended for use in laser printers.
- To prevent special media such as transparencies and label sheets from sticking together, remove them from the exit tray as they are printed.
- Place transparencies on a flat surface after removing them from the machine.
- Do not leave the special media in Paper Tray 1 (Bypass Tray) for long periods of time. Dust and dirt may accumulate on them resulting in spotty printing.
- To avoid smudging caused by fingerprints, handle transparencies and coated paper carefully.
- To avoid fading, do not expose the printed transparencies to prolonged sunlight.
- Store unused media at temperatures between 59°F and 86°F (15°C to 30°C). The relative humidity should be between 10 % and 70 %.
- When loading paper, do not fill above the *28lb (105g)* or *Maximum Fill* line.
- Verify that your labels' adhesive material can tolerate fusing temperature of 200°C (392°F) for 0.1 second.
- Ensure that there is no exposed adhesive material between labels.



CAUTION: Exposed areas can cause labels to peel off during printing, which can cause paper jams. Exposed adhesive can also cause damage to machine components.

- Do not feed a sheet of labels through the machine more than once. The adhesive backing is designed for one pass through the machine.
- Do not use labels that are separating from the backing sheet or are wrinkled, bubbled or otherwise damaged.

Media Types

The table below shows the media types supported for each tray.

Key:

O Supported **X** Not Supported

Types	Supported Weights	Paper Tray 1 (Bypass)	Paper Tray 2	Paper Trays 3, 4, 5 & 6 (Optional)	High Capacity Feeder (Optional)
Plain	60 to 120 g/m ² (16 to 32 lb)	O	O	O	O
Punched	60 to 120 g/m ² (16 to 32 lb)	O	O	O	O
Pre-printed	75 to 90 g/m ² (20 to 24 lb)	O	O	O	O
Letterhead	60 to 105 g/m ² (16 to 28 lb)	O	O	O	O
Heavyweight	106 to 216 g/m ² (28 to 58 lb)	O	X	X	X
Lightweight	60 to 70 g/m ² (16 to 18 lb)	O	O	O	O
Recycled	60 to 90 g/m ² (16 to 24 lb)	O	O	O	O
Envelope	75 to 90 g/m ² (20 to 24 lb)	O	O	X	X
Transparency	138 to 146 g/m ² (37 to 39 lb)	O	O	X	X
Labels	120 to 150 g/m ² (32 to 40 lb)	O	O	O	X
Card Stock	105 to 163 g/m ² (28 to 43 lb)	O	O	O	X
Bond	60 to 120 g/m ² (16 to 32 lb)	O	O	O	O
Archival	60 to 120 g/m ² (16 to 32 lb)	O	O	O	O
Custom 1 - 7	60 to 216 g/m ² (16 to 58 lb)	O	O	O	O
Special	105 to 120 g/m ² (28 to 32 lb)	O	O	O	O
Other	60 to 216 g/m ² (16 to 58 lb)	O	O	O	O

The media types are shown in the **Tray Paper Settings**. The **Paper Type** option allows you to set the type of paper to be loaded in the tray. For instructions, refer to [Tray Paper Settings](#) on page 61.

CentreWare Internet Services

CentreWare Internet Services uses the embedded HTTP Server on the machine. This allows you to communicate with your machine through a web browser. Entering the IP Address of the machine as the URL (Universal Resource Locator) in the browser provides direct access to the machine over the internet or intranet.

This chapter includes:

- [Using CentreWare Internet Services](#) on page 66
- [Status](#) on page 67
- [Jobs](#) on page 71
- [Print](#) on page 73
- [Properties](#) on page 74
- [Support](#) on page 75

Using CentreWare Internet Services

Prior to connecting to CentreWare Internet Services the machine must be physically connected to the network with TCP/IP and HTTP enabled. An operational workstation with *TCP/IP Internet* or *Intranet* accessibility is also required.

To access CentreWare Internet Services:

1. Open the web browser from your workstation.
2. In the URL field, enter `http://` followed by the IP Address of the machine. For example: if the IP Address is 192.168.100.100, enter the following into the URL field:
`http://192.168.100.100`
3. Press **Enter** to view the *Status* page.



The CentreWare Internet Services options for your machine are displayed.

Note To find the IP Address of your machine, print a configuration report. For instructions, refer to [Configuration Page](#) on page 79.

Status

The **Status** page provides information about your machine and access to the CentreWare Internet Services options.

General


The machine name, address details and status information is displayed. Use the **Refresh** option to update the *Machine Status* information.

If a different language is required, select the language drop-down menu and change to the language required.

Use the **Index** option to navigate to specific topics or the **Help** option to access www.xerox.com for further assistance.


The **Network Factory Default** button is used by the System Administrator to reset Network parameters to factory default values from the Internet. It causes the machine to set all Network values back to factory default.

Use the **Reboot Machine** option to reboot the machine. The Network Controller takes approximately 5 minutes to reboot and network connectivity will be unavailable during this time.

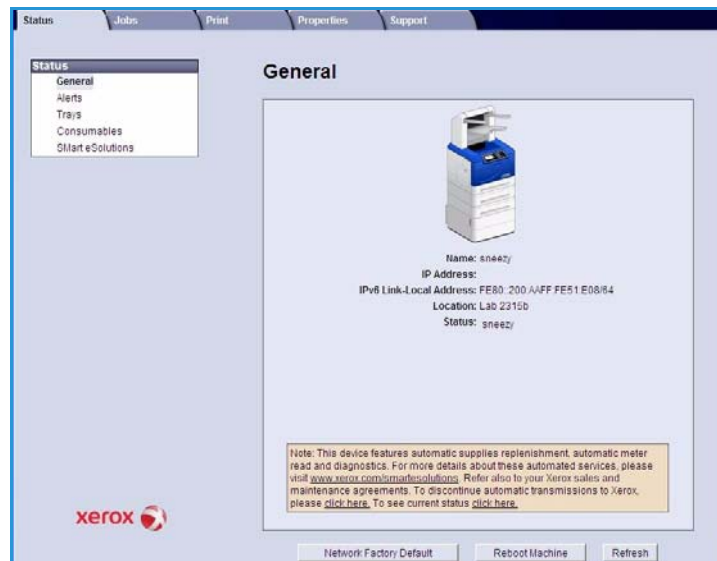

Alerts

This option provides a description of any problems or *Alerts* on the machine.

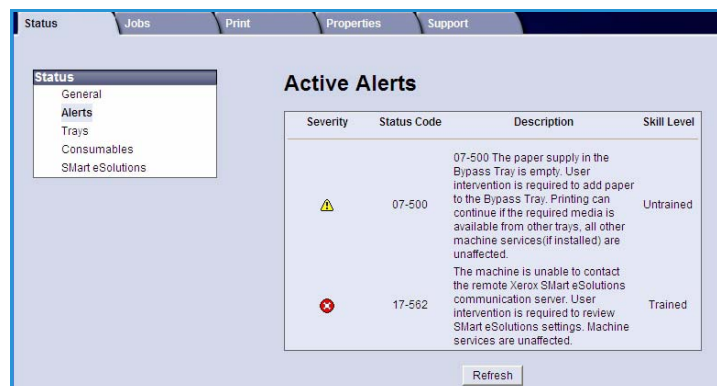

Trays

This area displays status information about all the paper trays and the output areas. It also provides information about the tray media and settings.

Paper Supply				
Paper Tray	Status	Size	Color	Type
Tray 1 (Bypass)	Empty	A4 (210x297mm)	White	Plain
Tray 2	Ready	Letter (8.5x11")	White	Plain
Tray 3	Ready	Custom Size	White	Plain

Output Destinations	
Paper Tray	Status
Output Tray	Ready

Consumables

This option provides information on the life of the machine consumables, such as the *Toner Cartridge* and the *SMart Kit Drum Cartridge*.

The status of each consumable and the percentage remaining is shown.

Print Cartridges		
Component	Status	% Life Remaining
Toner	Ready	98%

SMart Kit Drum Cartridge		
Component	Status	% Life Remaining
Drum Cartridge	Ready	99%

Smart eSolutions

Smart eSolutions provides the ability to automatically send data to Xerox to be used for billing, supplies tracking and replenishment and for troubleshooting problems.

Smart eSolutions provides the following features:

- **Meter Assistant™** - automatically submits meter readings to Xerox from networked machines. This ends the need to collect and report meter read information manually.
- **Supplies Assistant™** - manages toner and drum cartridge supplies for network equipment, and also monitors actual usage.
- **Maintenance Assistant** - monitors the machine and reports diagnostic information to Xerox through your network. You can also use the Maintenance Assistant to conduct an online troubleshooting session with Xerox and to download information about your machine performance.

Billing meter information sent in last transmission:	
Meter	Count
Total Impressions	802151625

Meter Assistant™

Meter Assistant™ provides detailed information, including dates, times, and counts of impressions sent in the last billing meter transmission. The meter data is recorded in the Xerox service management system. It is used for the invoicing of metered service agreements, and also for evaluating consumable usage against printer performance.

Email notifications can be setup to alert you of the following changes:

- **Billing meter reads reported** - an alert is generated when billing meter readings have taken place. You can set up your machine so that it will automatically offer meter readings when requested by the Xerox Communication Server.
- **Smart eSolutions enrollment is cancelled** - an alert is generated when the state is changed from "Enrolled" to "Not Enrolled."
- **Smart eSolutions communication error has occurred** - an alert is generated when there is a communication error.


For information about configuring the Meter Assistant™ settings, refer to the [System Administrator Guide](#).

Supplies Assistant™

The Supplies Assistant™ enables you to proactively manage toner and drum cartridge supplies for your machine, ensuring that you never run out. It monitors supplies usage and automatically orders supplies based on actual usage.

The most recent supplies usage information sent to Xerox can also be viewed. Use the **Refresh** button to ensure the latest information is displayed.


For information about configuring the Supplies Assistant™ settings, refer to the [System Administrator Guide](#).

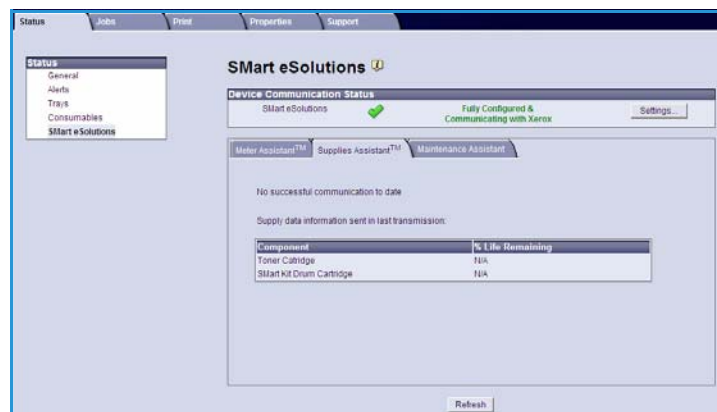

Maintenance Assistant

Maintenance Assistant monitors your machine and notifies Xerox support services of potential issues. It automates the notification, troubleshooting and repair process, minimizing machine downtime.

- If a problem occurs, you can use the **Send Diagnostics Information to Xerox...** option to immediately send information to Xerox which will assist with troubleshooting activities.

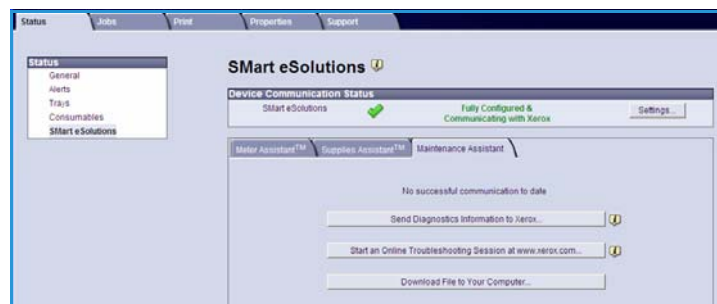


- Use the **Start an Online Troubleshooting session at www.xerox.com...** button to access the Xerox website for immediate advice on resolving machine problems.
- Use the **Download File to Your Computer...** button to save or view a CSV file containing detailed information about machine usage and any problems which have occurred on your machine.
- Use the **Refresh** button to view the latest status information.

For information about configuring the Maintenance Assistant settings, refer to the [System Administrator Guide](#).

Jobs

Active Jobs


Use this option to check the status of your job. The *Active Jobs* list displays a list of the current jobs and the status of each job.

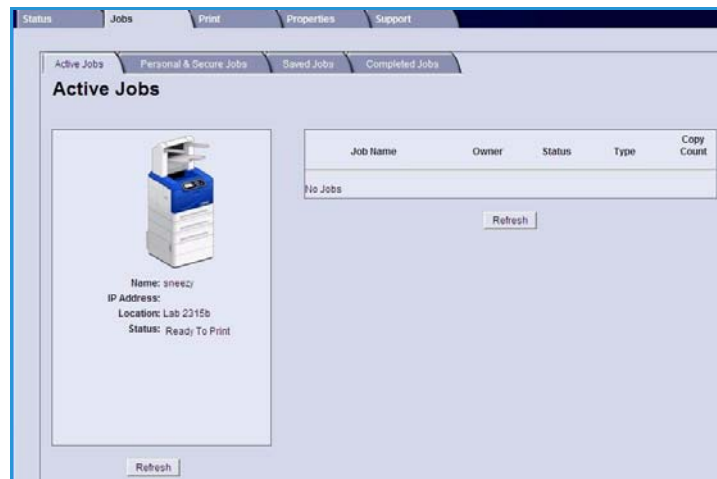

Personal & Secure Jobs

Personal & Secure Jobs can be submitted using the printer driver and held at the machine until selected by a user for printing or deleting.

After the job is submitted using the printer driver, a folder is automatically created and displayed in the **Personal & Secure Jobs** tab. The name of the folder is your user name acquired from your PC.

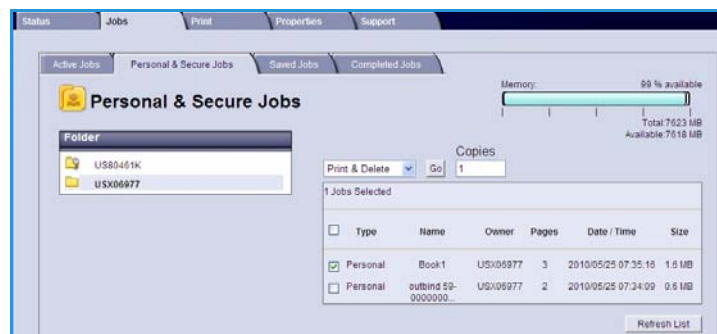


Select the folder required. If a secure folder is selected, enter the secure passcode in the login window. Select the checkbox next to the jobs required and select **Print** or **Delete** using the drop-down menu. If printing a job, enter the number of copies required. Select **Go**.

For information about submitting *Personal & Secure Jobs* using the printer driver, refer to [Print Procedure](#) on page 30. *Secure Print* jobs can also be submitted using CentreWare Internet Services, refer to [Print](#) on page 73 for instructions.

Saved Jobs

Jobs which have been saved to the machine memory can be accessed using the *Saved Jobs* option. *Saved Jobs* are stored in the folders listed.

Select the folder required. *Public* folders contain non-secure jobs and can be accessed by everyone. If a *Private* folder is selected, enter the secure passcode in the login window.

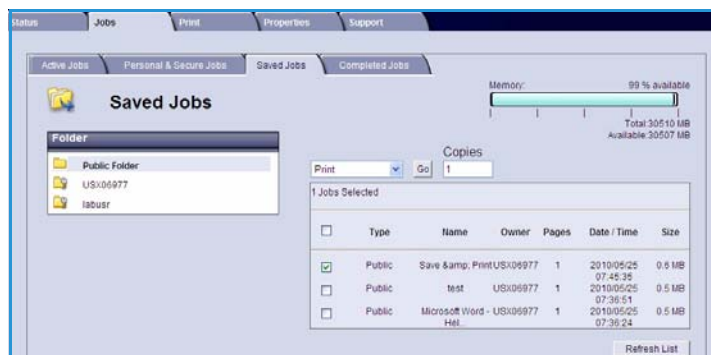

Select the checkbox next to the jobs required and select **Print** or **Delete** using the drop-down menu. If printing a job, enter the number of copies required. Select **Go**.

Completed Jobs

This option displays the jobs which have been completed on the machine. Up to 500 jobs can be displayed for standard configurations or 5000 jobs if the optional hard disk drive is installed. Information about the job is shown, for example the job name and submission time.



The list of jobs can be downloaded as a CSV or XML file. Use the **Clear All Completed Jobs** option to delete the jobs from the list.

Print

The *Print* option enables you to send a print ready job such as a PDF or PostScript file to the printer over the internet. You can send the job from your desktop or from a remote location.

To use the *Job Submission* option:

1. Program the printing options required.

- The **Printing** options enable you to select multiple copies, collate, image orientation and 2-sided printing.
- Use the **Paper** options to select the size, type and color of paper required. Use **Auto** to enable the machine to select the paper options.
- **Delivery** options enable you to select a proof, delay the time of printing or select a Secure Print job. If using Secure Print, enter a unique passcode. When the job arrives at the printer it is held in the job list until you release the job using the same passcode entered when the job was submitted.

Note For the Xerox Phaser 4600, the optional duplex unit must be installed to enable 2-sided printing.

2. Enter the file name of the job requiring printing, or use the **Browse** option to locate the file.
3. Select **Submit Job** to send the job to the printer over the internet.

The screenshot displays the 'Job Submission' window of the Xerox Phaser 4600/4620. On the left, a printer icon is shown with details: Name: sneezy, IP Address: Lab 2315b, and Status: sneezy. A 'Refresh' button is located below the printer icon. The main area is titled 'Job Submission' and contains three tabs: 'Printing', 'Paper', and 'Delivery'. The 'Printing' tab is selected, showing settings for Copies (radio buttons for 'Auto' and '1 (1-9999)'), Collate (radio buttons for 'Auto' and 'Off'), Orientation (radio buttons for 'Auto' and 'Landscape'), 2 Sided Printing (radio buttons for 'Auto' and 'Off'), and Staple (radio buttons for 'Auto' and 'Off'). The 'Paper' tab shows settings for Paper Size (radio buttons for 'Auto' and 'A4'), Paper Type (radio buttons for 'Auto' and 'A4'), and Paper Color (radio buttons for 'Auto' and 'A4'). The 'Delivery' tab shows options for 'immediate print', 'proof print', 'delayed print', and 'secure print'. The 'secure print' option is selected, and there are fields for 'Enter Secure Print ID' and 'Confirm Secure Print ID', both with a note '(4 - 10 digits)'. A 'Restore Default Values' button is at the bottom right.

Properties

The **Properties** option contains all the settings, setups and default values for installing and setting up the machine. These may be protected by a user name and password and should only be changed by your System Administrator.

For information about all the **Properties** options, refer to the [System Administrator Guide](#).

The screenshot shows the 'Properties' window for a Xerox Phaser 4600. The window has a tabbed interface with 'Status', 'Jobs', 'Print', 'Properties', and 'Support'. The 'Properties' tab is active, and the 'Description' sub-tab is selected. On the left, a 'Properties' sidebar lists 'Description', 'General Setup', 'Connectivity', 'Emulation', 'Services', 'Security', and 'Maintenance'. The main area displays the 'Identification' section with the following fields:


Identification	
Machine Model:	Xerox Phaser 4600
Product Code/Serial Number:	CFU000001
Machine Name:	sneezzy
Location:	Lab 2315b
Xerox Asset Tag Number:	
Customer Asset Tag Number:	

At the bottom of the form are 'Apply' and 'Undo' buttons. A copyright notice at the very bottom reads: 'Copyright © Xerox Corporation 1997-2010. All rights reserved.'

Support

The *Support* option provides useful links and information for upgrading your machine or getting further assistance for troubleshooting.

- **Software Upgrades** - select the Xerox website link to access the software download options for your machine.
- **Browser Software** - this option provides links for downloading browser software.
- **System Administrator** - provides contact details for your system administrator.
- **Xerox Support** - if a problem occurs, you can use the **Send Diagnostics Information to Xerox...** option to immediately send information to Xerox which will assist with troubleshooting activities. Use the **Start an Online Troubleshooting session at www.xerox.com...** button to access the Xerox website for immediate advice on resolving machine problems.

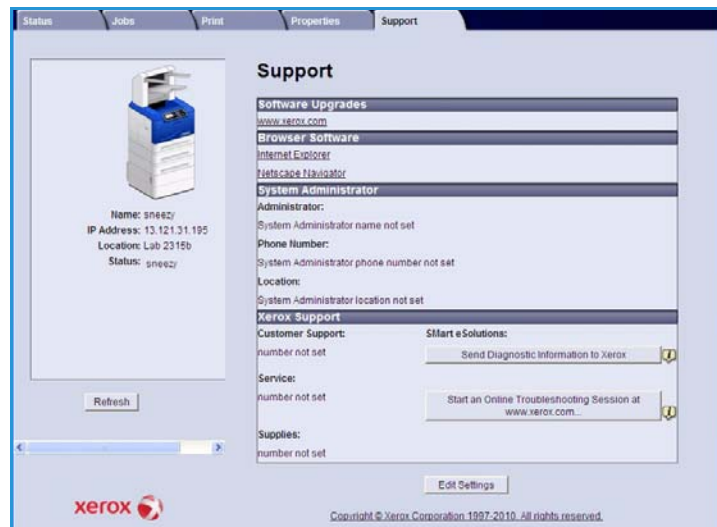

Use the **Refresh** button to view the latest status information. Use the **Edit Settings** button to enter or amend the System Administrator contact details.

Setups

7

This chapter identifies the settings that you can customize to meet your requirements. Changing these settings is easy and will save you time when using the machine.

This chapter includes:

- [Accessing Tools](#) on page 78
- [Configuration Page](#) on page 79
- [Setup](#) on page 80
- [File Security](#) on page 85
- [Special Feature Options](#) on page 86
- [Clone Printer](#) on page 87
- [Accounting Enablement](#) on page 88

Accessing Tools

All the machine setup features are accessed through the **Menu** button on the control panel. The setup and default options should be setup and customized by the System Administrator. Access to these options maybe passcode protected.

To access the default and setup options:

1. Press the **Menu** button on the Control Panel.
2. Press the up/down arrows to highlight the **Tools** option. Press **OK**.
3. If required, enter the Administrator's password using the keypad. The default is **1111**.

After entering a character press the **Right** arrow button to enable the next character to be entered, or wait 2 seconds between presses.

Continue entering characters until the full password has been entered.

4. Press the **OK** button on the Control Panel. Once the password is verified the **Tools** option menu displays:
 - [Configuration Page](#) on page 79
 - [Setup](#) on page 80
 - [File Security](#) on page 85
 - [Special Feature Options](#) on page 86
 - [Clone Printer](#) on page 87
 - [Accounting Enablement](#) on page 88

Customize the options required.

Settings can also be customized using CentreWare Internet Services, refer to the [System Administrator Guide](#) for more information.



Configuration Page

This report provides information about your machine setup, including the serial number, IP Address, installed options and the software version. To access the options:

1. Press the **Menu** button on the Control Panel.
2. Press the up/down arrows to highlight the **Tools** option and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
3. Press the up/down arrows to highlight **Configuration Page** and press **OK**.
4. Press the left arrow to highlight **Yes** at the **Print?** prompt and press **OK**.

The **Configuration Page** can also be printed via the **Information Pages** option, refer to [Information](#) on page 20.

You can also use CentreWare Internet Services to print the machine's configuration report or browse the status. Open a web browser at the networked computer and type the machine's IP Address. When CentreWare Internet Services opens, click **Properties > General > Configuration**.

Setup

The *Setup* options enable you to customize network settings, printer settings, general settings and machine settings which are specific to the machine, such as Date & Time and Power Management.

Network Settings

You may set up the network using the machine's display screen. Before doing that, you must have the relevant information concerning the type of network protocols and computer system you use. If you are not sure which setting to use, contact your System Administrator or refer to the [System Administrator Guide](#) for instructions.

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight **Tools** and press **OK**.
3. Press the up/down arrows to highlight **Setup** and press **OK**.
4. Press the up/down arrows to highlight **Network Settings** and press **OK**.

Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.

The following **Network Settings** options and settings are available:

Option	Description
TCP/IP v4 TCP/IPv6	Select appropriate protocol and configure parameters to use the network environment.
Network Services	Use to enable 802.1x and CentreWare Internet Services.
Ethernet Speed	Configure the network transmission speed.
Network Ping Test	Ping is a computer network administration utility used to test whether a particular host is reachable across an Internet Protocol (IP) network and to measure the round-trip time for packets sent from the local host to a destination computer, including the local host's own interfaces.
AppleTalk	Use to enable the machine to be setup on an AppleTalk network.
NetWare	Use to enable the machine to be setup on a NetWare network.
Wireless	Use to enable the machine to be configured on a wireless network connection.
Reset to Network Setup defaults	Reverts the network settings to the default values.

5. Press the up/down arrows to highlight the option required and press **OK**.
6. Press the up/down arrows to highlight the setting required and press **OK** to save the selection.

- Continue customizing the **Network Settings** options as required, then press **Stop** to return to ready mode.

PostScript Setup

- Press the **Menu** button on the control panel.
- Press the up/down arrows to highlight **Tools** and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
- Press the up/down arrows to highlight **Setup** and press **OK**.
- Press the up/down arrows to highlight **PostScript Setup** and press **OK**.

The following **PostScript Setup** options and settings are available:

Option	Description
PostScript Error Info	Enables the machine to print a PostScript Error page if PostScript problems occur during printing.
Edge to Edge Printing	Used to print to the edge of the output documents.

- Press the up/down arrows to highlight the option required and press **OK**.
- Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
- Continue customizing the **PostScript Setup** options as required, then press **Stop** to return to ready mode.

PCL Setup

- Press the **Menu** button on the control panel.
- Press the up/down arrows to highlight **Tools** and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
- Press the up/down arrows to highlight **Setup** and press **OK**.
- Press the up/down arrows to highlight **PCL Setup** and press **OK**.

The following **PCL Setup** options and settings are available:

Option	Description
Font Number	Sets the default PCL font.
Pitch	Sets the default pitch (size) for PCL fonts.
Symbol Set	Sets the default symbol set for PCL fonts.
Orientation	Sets the default orientation.
Form Length	Sets the default number of lines per page.

Option	Description
Line Termination	Sets the default line termination.
Wide A4	Sets the printable area of A4 paper size to 80 10-pitch characters.

- Press the up/down arrows to highlight the option required and press **OK**.
- Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
- Continue customizing the **PCL Setup** options as required, then press **Stop** to return to ready mode.

General Setup

The **Print Quality Mode** directly controls the quality of your prints. Set the default **Print Quality Mode** required.

- Press the **Menu** button on the control panel.
- Press the up/down arrows to highlight **Tools** and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
- Press the up/down arrows to highlight **Setup** and press **OK**.
- Press the up/down arrows to highlight **General Setup** and press **OK**.
- Press the up/down arrows to highlight **Print Quality Mode** and press **OK**.

The following **Print Quality Mode** options are available:

Option	Description
600 x 600 dpi	Best general-purpose mode for high-speed printing. Produces crisp, bright prints.
1200 x 1200 (Enhanced)	Highest-quality prints with best detail. Recommended for photo prints.
Draft Mode	This mode saves toner and is suitable for draft printing.

- Press the up/down arrows to highlight the setting required and press **OK**.
- Press **Stop** to return to ready mode.

Machine Settings

- Press the **Menu** button on the control panel.
- Press the up/down arrows to highlight **Tools** and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
- Press the up/down arrows to highlight **Setup** and press **OK**.
- Press the up/down arrows to highlight **Machine Settings** and press **OK**.

The following **Machine Settings** options are available:

Option	Description	Settings
User Interface	Use this option to set the message display language, the timeout options, if a job sheet is required and the stock for the job sheets.	• Language • Held Job Timeout • Menu Timeout • Job Sheets • Stock Choice
Date & Time	You can set your machine to display the current time using either a 12-hour or 24-hour format and also set the date format.	• Format Date • Format Time
Metric Defaults	Use to set the machine to display measurements in millimeters or inches.	• Inches • Millimetres
Default Paper Size	This is the most common paper size that will be used in the machine and is the size the machine will feed if a specific size is not selected.	• Letter • A4
Power Management	Use this option to enable Power Saver mode and set the time the machine waits before entering Power Saver mode.	• Power Saver Settings • Power Saver
Altitude Adjustment	The xerographic process used in your machine to make prints is affected by air pressure. Air pressure is determined by the height of the machine above sea level. The machine will automatically compensate for differences in air pressure if you enable the feature.	• Enable • Disable
Quiet Mode	This sets the machine to run at half speed (32ppm) to achieve a 52 dB noise level.	• On • Off

Option	Description	Settings
Output Settings	Use to set the default output settings.	• Collation • 2-Sided Printing (optional) • Paper Destination • Output Tray Switch • Stapling Options (available with Finisher only)
Permanent Mode	Use to permanently set the Paper Type and Size for each tray. The Type and Size specified must be loaded by the user.	• Tray 1 (Bypass) • Tray 2 • Tray 3 • Tray 4 • Tray 5 • Tray 6

5. Press the up/down arrows to highlight the option required and press **OK**.
6. Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
7. Continue customizing the **Machine Settings** as required, then press **Stop** to return to ready mode.

File Security

If you have sent print jobs to the machine that are confidential or sensitive, you can delete any data that is stored on the hard disk after the job has been printed using Immediate Overwrite or On Demand Overwrite. To access the options:

1. Press the **Menu** button on the Control Panel.
2. Press the up/down arrows to highlight the **Tools** option and press **OK**.

Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.

3. Press the up/down arrows to highlight **File Security** and press **OK**.

The following **File Security** options are available:

Option	Description
Immediate Overwrite	Use this option to enable the Image Overwrite activity after each job.
On Demand Overwrite	Use this option to enable a Standard or Full overwrite activity. • Standard overwrite takes approximately 11 minutes and excludes jobs and folders stored in the Saved Jobs feature • Full overwrite takes approximately 53 minutes and includes jobs and folders stored in the Save Jobs feature.

4. Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
5. Continue customizing the **File Security** options as required, then press **Stop** to return to ready mode.

Special Feature Options

These options provide access to special features and functions that have been loaded on your machine. To access the options:

1. Press the **Menu** button on the Control Panel.
2. Press the up/down arrows to highlight the **Tools** option and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
3. Press the up/down arrows to highlight **Special Feature Options** and press **OK**.
The **Special Feature Options** are available.
Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
4. Continue customizing the **Special Feature Options** as required, then press **Stop** to return to ready mode.

Clone Printer

Cloning enables you to conveniently copy the settings of one machine and transfer them to other machines.

For instructions on Cloning a Printer refer to the [System Administrator Guide](#).

Accounting Enablement

Accounting options can be used to restrict access to the machine and record machine usage by different jobs, groups or departments. To access the options:

1. Press the **Menu** button on the Control Panel.
2. Press the up/down arrows to highlight the **Tools** option and press **OK**.
Note If a password is required, refer to [Accessing Tools](#) on page 78 for instructions.
3. Press the up/down arrows to highlight **Accounting Enablement** and press **OK**.
4. Press the up/down arrows to highlight **On** and press **OK**.

The following **Accounting Enablement** options are available:

Option	Description
Authentication	Use this option to enable or disable authentication mode. Disabling this option allows access to any User ID and Account ID entered.
Display Mode	Use this option to mask the User ID or Account ID when it is being entered on the display.

5. Press the up/down arrows to highlight the setting required and press **OK** to save the selection.
6. Press **Stop** to return to ready mode.

For information about setting up the Accounting options, refer to the [System Administrator Guide](#).

General Care and Troubleshooting

This chapter includes:

- [General Care](#) on page 90
- [Troubleshooting](#) on page 97
- [Further Assistance](#) on page 118

General Care

There are several consumables on the machine that need replenishing or replacing, such as paper, staples, and Customer Replaceable Units. To place an order for Xerox consumables, please contact your local Xerox Representative giving your Company Name, product number and the machine serial number.

If SMart eSolutions is configured on your machine, the Supplies Assistant™ enables you to proactively manage toner and drum cartridge supplies for your machine, ensuring that you never run out. For more information, refer to [Supplies Assistant™](#) on page 69.

Supplies can also be ordered from www.xerox.com, refer to [Consumables](#) on page 68 for further information.

The machine serial number can be displayed by pressing the **Menu** button, then selecting **Information** and then **About this Printer**. For further information about locating the serial number, please refer to [Locating the Serial Number](#) on page 118.

Customer Replaceable Units

The Toner Cartridge, Waste Toner Bottle, Staple Cartridge, and SMart Kit Drum Cartridge are Customer Replaceable Units (CRUs) on the machine.

The machine will display a message when a CRU needs to be replaced. Only replace the unit when a message instructs you to do so or when instructed by a Xerox Representative. To replace a Customer Replaceable Unit, follow the instructions provided within this guide or with the consumable.

 **CAUTION:** When replacing consumables, DO NOT remove the covers or guards that are fastened with screws. You cannot maintain or service any of the parts that are behind these covers and guards. DO NOT attempt any maintenance procedure unless specifically described in the documentation supplied with your machine.

Storage and Handling

Follow the guidelines below for storing and handling Customer Replaceable Units:

- Always store units unopened and inside their original package.
- Store the correct side up in a horizontal position (not standing on end).
- Do not store consumables in:
 - Temperatures greater than 40°C (104°F).
 - Humidity range less than 20 % and not greater than 80 %.
 - An environment with extreme changes in humidity or temperature.
 - Direct sunlight or room light.
 - Dusty places.
 - A vehicle for a long period of time.
 - An environment where corrosive gases are present.

- An environment with salty air.
- Do not store consumables directly on the floor.
- Do not touch the surface of the photosensitive drum.
- Do not expose the Toner Cartridge to unnecessary vibrations or shock.
- Never manually rotate the drum, especially in the reverse direction; this can cause internal damage.

Toner Cartridge


Toner cartridges contain components that are sensitive to temperature and humidity. Follow the recommendations provided to ensure the optimum performance, highest quality, and longest life from your new Toner Cartridge. Store the cartridge in the same environment as the printer it will be used in; this should be in controlled office temperature and humidity conditions. The Toner Cartridge should remain in its original, unopened package until installation.

When the Toner Cartridge is empty a message appears on the display. To replace the Toner Cartridge:


1. Open the top cover. This will reveal the Toner Cartridge.
2. Gently lift up the orange handle slightly, then carefully remove the Toner Cartridge.

The instructions that are packed with the new Toner Cartridge will tell you how to dispose of the used Toner Cartridge.

! WARNING: Only install the correct Xerox Toner Cartridge in the machine.

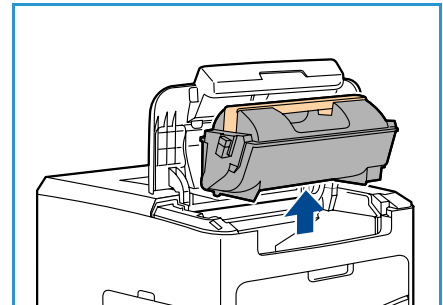


3. Before unpacking the new Toner Cartridge, shake well to distribute the toner. Remove from packaging.
4. To fit the new Toner Cartridge, make sure the toner is facing the correct way up.

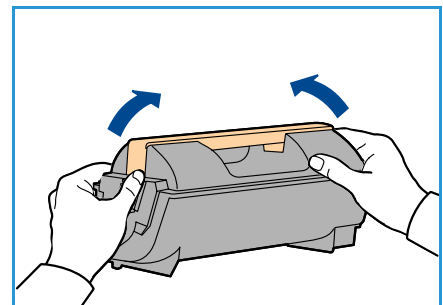

5. Slide the Toner Cartridge into the machine until the Toner Cartridge clicks into place.
6. Close the top cover.

When a new Toner Cartridge is installed, the machine will reset the toner usage counter and message automatically. If the Toner Cartridge that is installed is not new, the machine will automatically detect the amount of toner remaining and reset usage counters and messages accordingly.

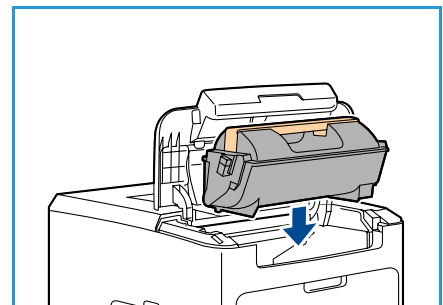


Waste Toner Bottle


One waste toner bottle is supplied with each Toner Cartridge. The waste toner bottle must be replaced at the same time as replacing the Toner Cartridge.

To replace the waste toner bottle:


1. Open the waste toner bottle access door on the left side of the machine.

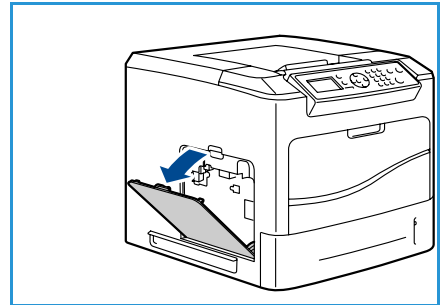

2. Remove the used waste toner bottle and dispose of it according to the instructions provided.

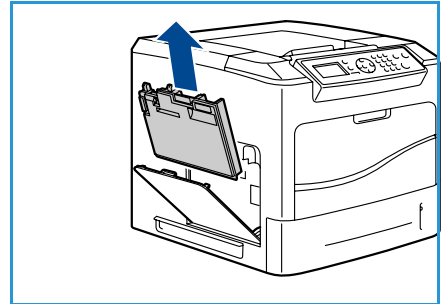

3. Unpack and install the new waste toner bottle.
4. Close the access door.

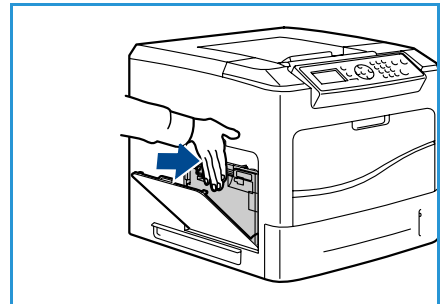


SMart Kit Drum Cartridge

Drum cartridges contain components that are sensitive to temperature and humidity. Follow the recommendations provided to ensure the optimum performance, highest quality, and longest life from your new SMart Kit Drum Cartridge.


To replace the SMart Kit Drum Cartridge:

1. Remove the Toner Cartridge, as described in [Toner Cartridge](#) on page 91.


2. Gently lift up the orange handle slightly, then carefully remove the Drum Cartridge.
3. Remove the new Drum Cartridge from its box.

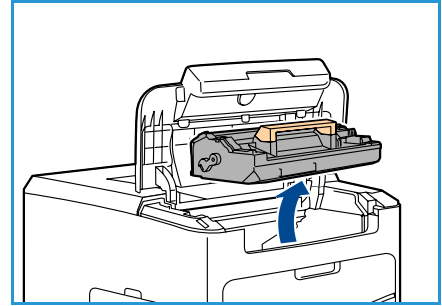

4. Carefully remove the protective sheet from the Drum Cartridge by pulling up the sealing tape.

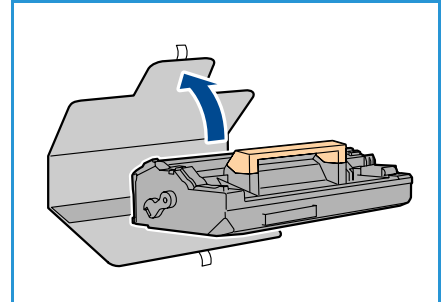


5. Slide the new Drum Cartridge into the slot until the Drum Cartridge clicks into place.
6. Pull the cartridge tape straight out without breaking it.
7. Push the Drum Cartridge again to make sure it is still positioned correctly in the slot.
8. Replace the Toner Cartridge as described in [Toner Cartridge](#) on page 91.

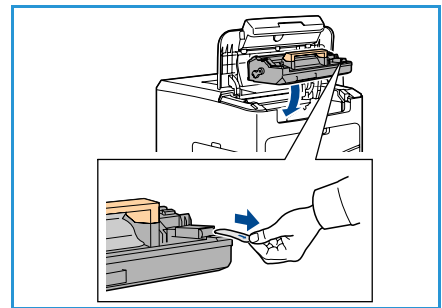


Staple Cartridge

If the optional Finisher is fitted, this procedure shows you how to remove a used staple cartridge and replace it with a new staple cartridge. The staple cartridge holds 5000 staples.


1. Open the staple cartridge cover.

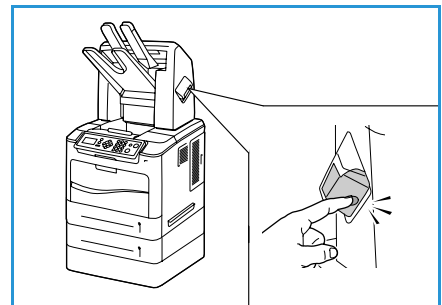


2. Pull on the handle to remove the empty staple cartridge.
3. Remove the used staple cartridge from the cartridge holder.
4. Dispose of the used staple cartridge.

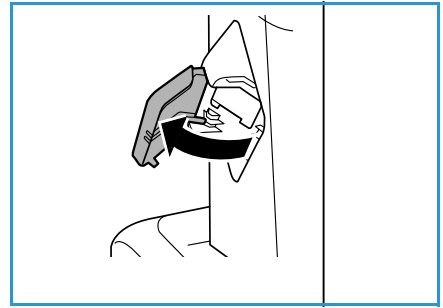

5. Remove the new staple cartridge from its packaging.
6. Make sure that the staple strips on top of the stack are complete and flat. Remove any partial strips and any strips that are bent.

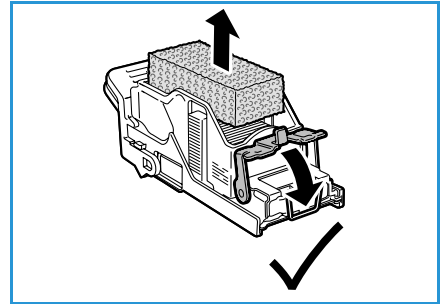

7. Insert the new staple cartridge into the cartridge holder, and push the staple cartridge in firmly until it clicks into position.
8. Close the staple cover door.

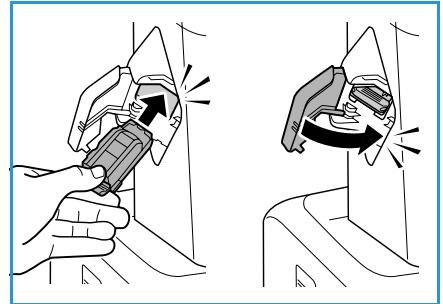

Routine Maintenance Items

Routine maintenance items are printer parts that have a limited life and require periodic replacement. Replacements may be parts or kits. Routine maintenance items are typically customer replaceable.

The only routine maintenance item for the Phaser 4600/4620 is the maintenance kit. The maintenance kit contains:

- Fuser
- Transfer roller
- 12 feed rollers

Print the *Supplies Usage Page* to see the remaining life of the Maintenance Kit:

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Information** option. Press **OK**.
3. Press the up/down arrows to highlight the **Information Pages** option. Press **OK**.
4. Press the up/down arrows to highlight the **Supplies Usage Page** option. Press **OK**.
5. Press the left/right arrows to highlight **Yes** at the **Print?** prompt and press **OK**.
The Supplies Usage Page is printed.



Instructions for replacing the routine maintenance items are provided in the maintenance kit.

Cleaning the Machine

⚠ WARNING: When cleaning your machine DO NOT use organic or strong chemical solvents or aerosol cleaners. DO NOT pour fluids directly onto any area. Use supplies and cleaning materials only as directed in this documentation. Keep all cleaning materials out of the reach of children.


⚠ WARNING: DO NOT use pressurized air-spray cleaning aids on or in this equipment. Some pressurized air-spray containers contain explosive mixtures and are not suitable for use in electrical applications. Use of such cleaners can result in a risk of explosion and fire.

⚠ CAUTION: DO NOT remove the covers or guards that are fastened with screws. You cannot maintain or service any of the parts that are behind these covers and guards. DO NOT attempt any maintenance procedure that is NOT specifically described in the documentation supplied with your machine.

Control Panel

Regular cleaning keeps the screen and control panel free from dust and dirt. To remove finger prints and smudges, clean the screen and control panel as below:


1. Use a soft, lint-free cloth, lightly dampened with water.
2. Wipe clean the entire area, including the screen.
3. Remove any residue with a clean cloth or paper towel.

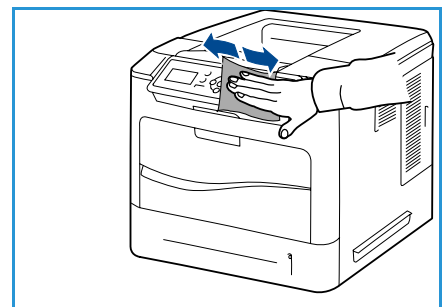

Output Tray, Finisher and Mailbox Bins

Regular cleaning keeps the output areas free from dust and dirt.

1. Use a soft, lint-free cloth, lightly dampened with water.
2. Wipe clean the output tray, finisher areas or mailbox bins and the outside areas of your machine.
3. Remove any residue with a clean cloth or paper towel.

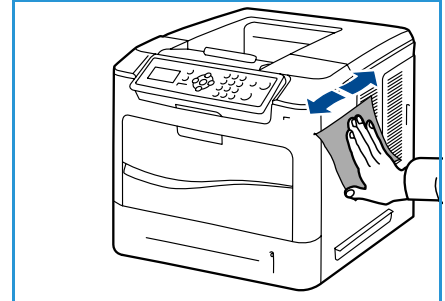

Moving the Machine

When moving the machine, do not tilt or turn it upside down. Otherwise, the inside of the machine may be contaminated by toner, which can cause damage to the machine or bad print quality.

When moving the machine, make sure at least two people are holding the machine securely.

Troubleshooting

A variety of situations can affect the quality of your output. For optimal performance, ensure these guidelines are followed:

- Do not position the machine in direct sunlight or near a heat source such as a radiator.
- Avoid sudden changes in the environment surrounding the machine. When a change occurs, allow the machine at least two hours to adjust to its new environment, depending on the extent of the change.
- Follow routine maintenance schedules for cleaning areas such as the control panel and output tray.
- Always set the guides in the paper trays to the size of the media in the tray and ensure the correct size is displayed.
- Ensure paper debris does not contaminate the machine.

For additional Troubleshooting information, refer to the [System Administrator Guide](#).

Fault Clearance

When a fault occurs, the *Error* screen displays a list of the current faults or alerts. When the *Error* screen is displayed, press **OK** for further information. Follow the instructions in this guide to clear the fault. Any printed sheets removed will automatically be reprinted once the paper jam is cleared.

To exit the *Error* screen, press the **Back** button until the *Machine Status* screen is displayed. If a fault has occurred and the *Error* screen is not visible, press the **Back** button to access the *Error* screen. Pressing the **Back** button repeatedly alternates between the *Machine Status* screen and the *Error* screen.

Tips for Avoiding Paper Jams

By selecting the correct media types, most paper jams can be avoided.


- Ensure that the adjustable guides are positioned correctly. (See [Loading Paper](#) on page 56.)
- Do not overload the tray. Ensure that the paper level is below the paper capacity mark on the inside of the tray.
- Do not remove paper from the tray while your machine is printing.
- Flex, fan, and straighten paper before loading.
- Do not use creased, damp or highly curled paper.
- Do not mix paper types in a tray.
- Use only recommended print media. (See [Media Specifications](#) on page 62.)
- Ensure that the recommended side of the print media is facing up for Paper Tray 1 (Bypass) or facing down for the other trays.

Paper Trays 2, 3, 4, 5 and 6


The control panel will specify the tray that has a paper jam. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.

1. Pull the tray(s) specified on the control panel completely out of the printer.


Note For all trays, pull out the specified tray and all trays above it. For example, if the jam is in Tray 4, pull out Trays 2 and 3.

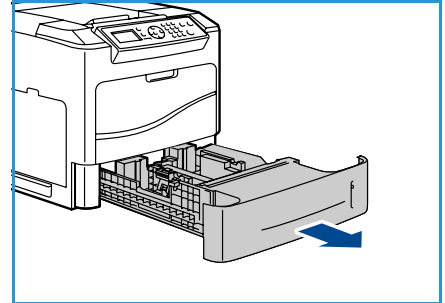


2. Pull jammed paper from the printer tray slot.

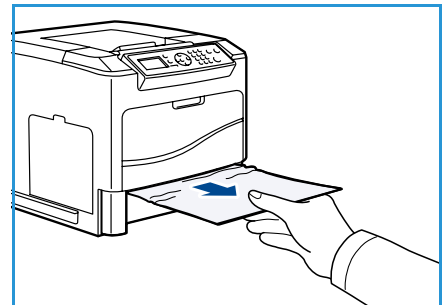


3. Remove crumpled paper from the tray.

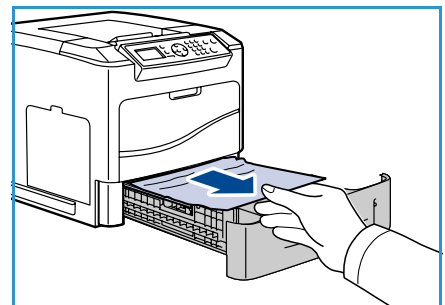


4. Open the top cover and remove the Toner Cartridge.

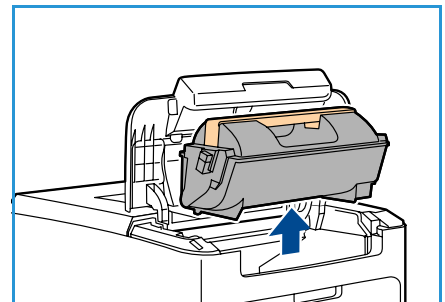

5. Remove the Drum Cartridge.
6. Remove the jammed paper. Confirm that all paper fragments are removed.

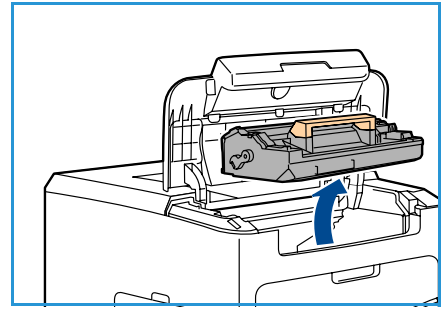


7. Insert the Drum Cartridge and the Toner Cartridge and close the top cover.
8. Replace all the trays.

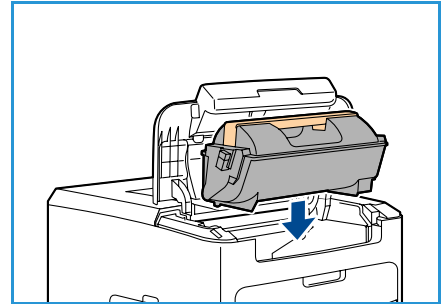


High Capacity Feeder Jams

The control panel will specify the tray that has a paper jam. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.


1. Opening the tray automatically lowers an elevator in the base of the tray.

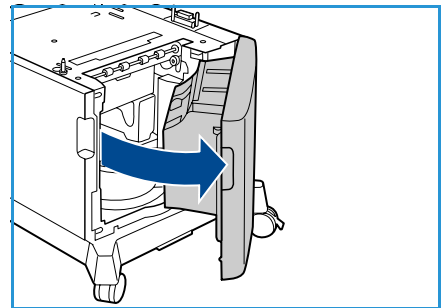

2. Remove crumpled paper from the tray.

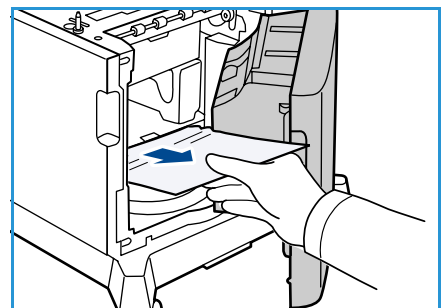


3. Close the High Capacity Feeder door.

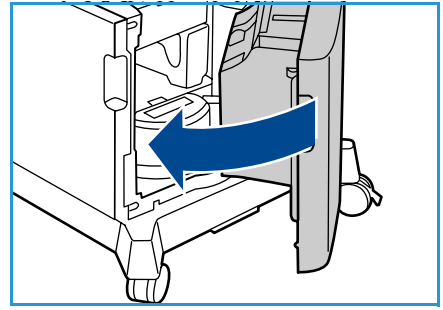


Top Cover Areas

There is a jam at the exit or at the rear cover. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.


1. Open the top cover and remove the Toner Cartridge.

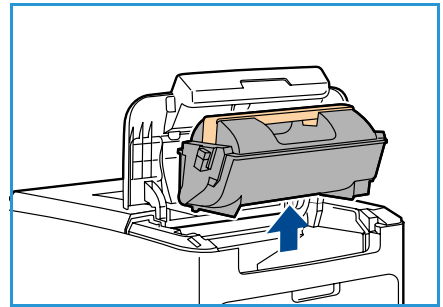

2. Remove the Drum Cartridge.

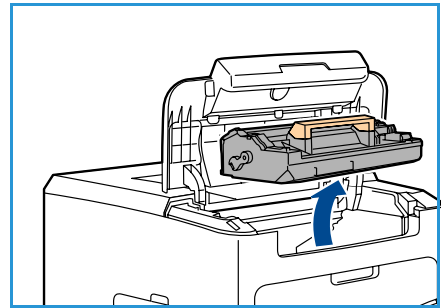

3. Lift baffle by green handle and gently pull the jammed paper out of the rollers.
4. If you cannot move the jammed paper, pull Tray 2 completely out of the printer.
5. Replace the tray.
6. Insert the Drum Cartridge and the Toner Cartridge and close the top cover.

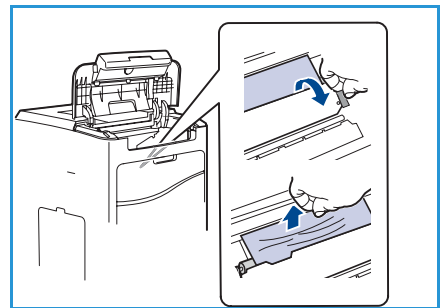


Rear Cover Areas


There is a jam at the exit or at the rear cover. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.

1. Open the rear cover.


 **WARNING:** Be careful, some components inside the rear cover may be hot.

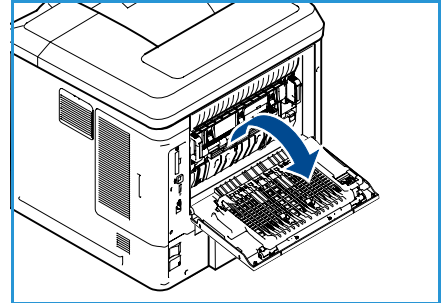

2. Remove the jammed paper. Confirm that all paper fragments are removed.

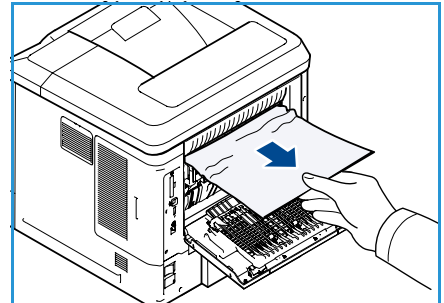


3. If you did not find jammed paper in Step 2, open the fuser exit guide door and pull the jammed paper completely out of the printer.
4. Close the fuser exit guide door and the rear cover.

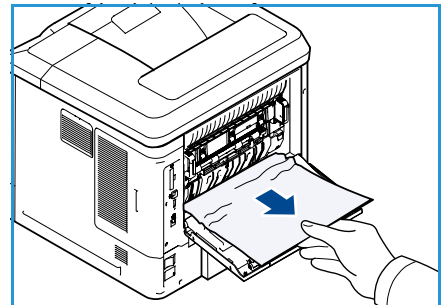


Duplex Unit (optional)

There is a jam at the exit or at the rear cover and the duplex unit is fitted. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.

1. Open the top cover.

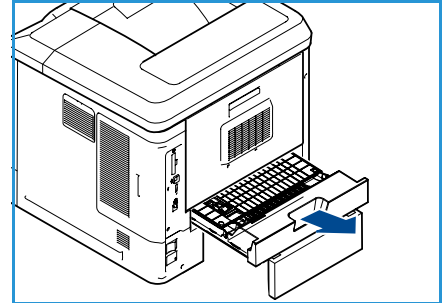


2. Pull the duplex unit out of the printer. If the paper does not come out with the duplex unit, remove the paper from the bottom of the printer.
3. Reinstall the duplex unit and close the top cover.

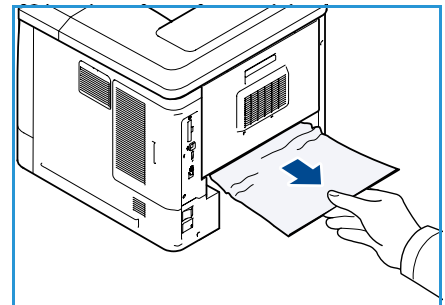

Output Areas

There is a jam at the exit or at the rear cover. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.


1. Remove the jammed paper from the exit. Confirm that all paper fragments are removed.
2. Open and then close the top cover.

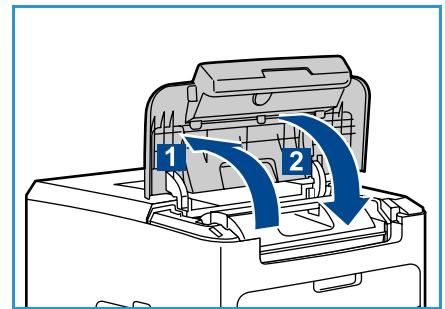


Finisher

There is a jam at the exit or at the rear finisher door. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.

1. Open the rear finisher door

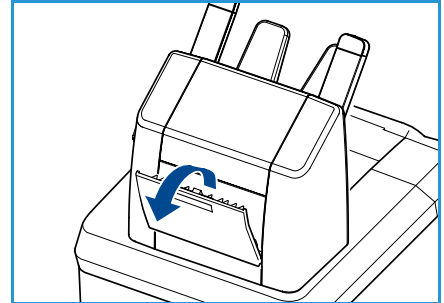


2. Remove the jammed paper. Confirm that all paper fragments are removed.
3. Close the rear finisher door.

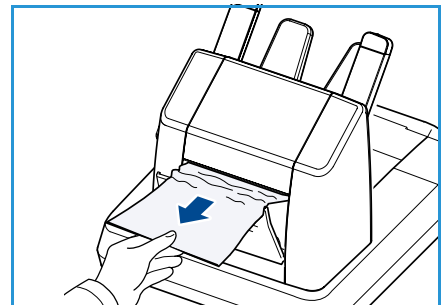

Paper Size Jam

There is a jam at the exit or at the rear cover. The control panel will specify a fault has occurred. When the *Error* screen is displayed, press **OK** for further information. If the *Error* screen is not visible, press the **Back** button to access the *Error* screen.


1. Pull the tray completely out of the printer.
2. Confirm that the paper tray guides are pressed firmly against the paper.
3. Insert the tray into the printer slot and push it completely to the back of the printer.
4. If the control panel prompts you:
 - If you haven't changed the type of paper, press the **OK** button.
 - If you have changed the type of paper, scroll to the correct paper type and press the **OK** button.

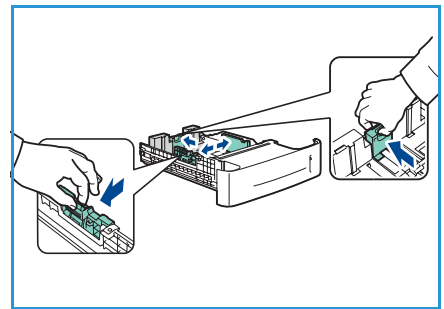

5. If you have a duplex unit, open the duplex unit cover.
6. Open the rear cover.

⚠ WARNING: Be careful, some components inside the rear cover may be hot.

7. Remove the jammed paper. Confirm that all paper fragments are removed.
8. Close the rear cover.
9. If you have a duplex unit, close the duplex unit cover.

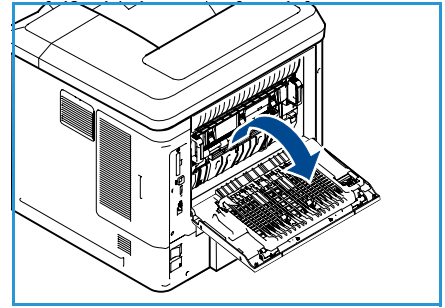

Error Messages

Use the following information to solve problems on the machine. Some messages may not appear in the display depending on options or models.

Location	Errors & Faults	Description	Solution
Paper Feeder	Door Open	The back cover and top covers are not securely latched.	Close the covers until they lock into place. If fault persists, call service.
	Paper Empty at Tray	The paper in the paper tray has run out.	Load paper in the tray indicated by the warning message.
	Paper Empty at Bypass Tray	The paper in Paper Tray 1 (Bypass) has run out.	Load paper in Paper Tray 1 (Bypass).
	Tray Open	Paper tray is not securely closed.	Close the paper tray until it locks into place.
	Jam from Tray	Paper has jammed in the paper tray.	Open the indicated tray and remove the jammed paper. Open the rear and top covers and remove jam.
	Duplex Jam	Paper has jammed in the duplex area.	Follow instructions on the back of the printer.

Location	Errors & Faults	Description	Solution
CRU	Toner Low	Toner Cartridge is almost empty.	Open top cover. Remove Toner Cartridge and gently shake it. By doing this, printing operations can be temporarily resumed. Reinstall Toner Cartridge. Close top cover. Reorder Toner Cartridge.
	Toner Empty	Toner Cartridge is empty.	Open top cover. Replace with new Toner Cartridge.
	Toner Cartridge Not Installed	The Toner Cartridge is not installed or not installed correctly.	Install the Toner Cartridge. If already installed, check it has been installed correctly. If problem persists, call for service.
	Toner Supplying Error	Toner is not being supplied correctly.	Check the Toner Cartridge is installed securely.
	Invalid Toner Cartridge	The installed Toner Cartridge is not a valid Xerox cartridge.	Check the Toner Cartridge and install a valid Xerox cartridge if necessary. If problem persists, call for service.
Output Areas	Output Tray Full	Output tray full.	Remove printed material from Output tray.
	Staple Cartridge Not Installed	Staple cartridge not installed.	Install staple cartridge.
	Stapler Fault	Stapler unit does not work.	Open stapler door and check the stapler. Close stapler door. If the fault persists, Power Off / Power On. If the problem persists, call for service.

Paper Feeding Problems

The following chart lists some conditions that may occur and the recommended solutions. Follow the suggested solutions until the problem is corrected. If the problem persists, call for service.

Condition	Suggested Solutions
Paper jams during printing.	Clear the paper jam. (See Fault Clearance on page 97.)
Paper sticks together.	- Check the maximum paper capacity of the tray. (See Paper Supply on page 123.) - Make sure that you are using the correct type of paper. (See Media Specifications on page 62.) - Remove paper from the tray and flex or fan the paper. - Humid conditions may cause some paper to stick together.
Paper does not feed into the machine.	- Remove any obstructions from inside the machine. - Paper has not been loaded correctly. Remove paper from the tray and reload it correctly. - There is too much paper in the tray. Remove excess paper from the tray. - The paper is too thick. Use only paper that meets the specifications required by the machine. (See Paper Supply on page 123.) - If you are printing on special media, use Paper Tray 1 (Bypass).
The paper keeps jamming.	- There is too much paper in the tray. Remove excess paper from the tray. If you are printing on special materials, use Paper Tray 1 (Bypass). - An incorrect type of paper is being used. Use only paper that meets the specifications required by the machine. (See Media Specifications on page 62.) - There may be debris inside the machine. Open the top cover, remove the Toner Cartridge and any debris. Re-insert the Toner Cartridge.
Transparencies stick together in the paper exit.	Use only transparencies specifically designed for laser printers. Remove each transparency as it exits from the machine.
Envelopes skew or fail to feed correctly.	Ensure that the paper guides are against both sides of the envelopes.

Printing Problems

Condition	Possible Cause	Suggested Solutions
The machine does not print.	The machine is not receiving power.	Check the power cord connections. Check the power switch and the power source.
	The machine is not selected as the default machine.	Select your machine as your default machine in Windows.
	Check the machine for the following: - The top cover is not closed. Close the top cover. - Paper is jammed. Clear the paper jam. (See Fault Clearance on page 97.) - No paper is loaded. Load paper. (See Loading Paper on page 56.) - The Toner Cartridge is not installed. Install the Toner Cartridge. If a system error occurs, contact your service representative.	
	The connection cable between the computer and the machine is not connected properly.	Disconnect the machine cable and reconnect it.
	The connection cable between the computer and the machine is defective.	If possible, attach the cable to another computer that is working properly and print a job. You can also try using a different machine cable.
	The port setting is incorrect.	Check the Windows printer setting to make sure that the print job is sent to the correct port. If the computer has more than one port, make sure that the machine is attached to the correct one.
	The machine may be configured incorrectly.	Check the printer driver options to ensure that all of the print settings are correct. (See Print Procedure on page 30.)
	The printer driver may be incorrectly installed.	Reinstall the printer software. (Refer to the System Administrator Guide for instructions.)
	The machine is malfunctioning.	Check the display message on the control panel to see if the machine is indicating a system error. Contact a service representative.
	The document size is so big that the hard disk space of the computer is insufficient to access the print job.	You might need to reduce the complexity of the page or install more memory. (Refer to the System Administrator Guide.)

Condition	Possible Cause	Suggested Solutions
The machine selects print materials from the wrong paper source.	The paper option that was selected in the Printing Preferences may be incorrect.	For many software applications, the paper source selection is found under the Paper tab within the Printing Preferences. Select the correct paper source. (See Paper/Output on page 31.)
A print job is extremely slow.	The job may be very complex.	Reduce the complexity of the page or try adjusting the print quality settings.
Half the page is blank.	The page orientation setting may be incorrect.	Change the page orientation in your application. See the printer driver help screen.
	The paper size and the paper size settings do not match.	- Ensure that the paper size in the printer driver settings matches the paper in the tray. - Or, ensure that the paper size in the printer driver settings matches the paper selection in the software application settings you use.
The machine prints, but the text is wrong, garbled or incomplete.	The machine cable is loose or defective.	- Disconnect the machine cable and reconnect. Try a print job that you have already printed successfully. If possible, attach the cable and the machine to another computer that you know works and try a print job. - Try a new machine cable.
	The wrong printer driver was selected.	Check the application's printer selection menu to ensure that your machine is selected.
	The software application is malfunctioning.	Try printing a job from another application.
	The operating system is malfunctioning.	Exit Windows and reboot the computer. Turn the machine off and back on again.
Pages print, but they are blank.	The Toner Cartridge is defective or out of toner.	- Redistribute the toner, if necessary. - If necessary, replace the Toner Cartridge.
	The file may have blank pages.	Check the file to ensure that it does not contain blank pages.
	Some parts, such as the controller or the board, may be defective.	Contact a service representative.

Condition	Possible Cause	Suggested Solutions
The machine does not print PDF file correctly. Some parts of graphics, text or illustrations are missing.	Incompatibility between the PDF file and the Acrobat products.	Printing the PDF file as an image may enable the file to print. Turn on Print As Image from the Acrobat printing options. It will take longer to print when you print a PDF file as an image.
The print quality of photos is not good. Images are not clear.	The resolution of the photo is very low.	Reduce the photo size. If you increase the photo size in the software application, the resolution will be reduced.
Before printing, the machine emits vapor near the output tray.	Using damp paper can cause vapor during printing.	Replace the paper.
The machine does not print special-sized paper, such as billing paper.	Paper size and paper size setting do not match.	Set the correct paper size in the Custom Paper Size Settings in the <i>Paper/Output</i> tab in the Printing Preferences. (See Paper/Output on page 31.)

Common PostScript Problems

The following situations are PS language specific and may occur when several printer languages are used.

Problem	Possible Cause	Solution
PostScript file cannot be printed.	The PostScript driver may not be installed correctly.	- Install the PostScript driver. (Refer to the System Administrator Guide for instructions.) - Print a configuration page and verify that the PS version is available for printing. - If the problem persists, contact a service representative.
"Limit Check Error" report prints.	The print job was too complex.	You might need to reduce the complexity of the page or install more memory. (Refer to the System Administrator Guide.)

Problem	Possible Cause	Solution
A PostScript error page prints.	The print job may not be PostScript.	Make sure that the print job is a PostScript job. Check to see whether the software application expected a setup or PostScript header file to be sent to the machine.
The optional tray is not selected in the driver.	The printer driver has not been configured to recognize the optional tray.	Open the PostScript driver properties, select the Device Settings tab, and set the tray option of the Installable Options section to Installed.
When printing a document in Macintosh with Acrobat Reader 6.0 or higher, colors print incorrectly.	The resolution setting in the printer driver may not be matched with the one in Acrobat Reader.	Make sure that the resolution setting in your printer driver matches the one in Acrobat Reader.

Common Windows Problems

Condition	Suggested Solutions
"File in Use" message appears during installation.	Exit all software applications. Remove all software from the printer's startup group, then restart Windows. Reinstall the printer driver.
"General Protection Fault", "Exception OE", "Spool 32" or "Illegal Operation" messages appear.	Close all other applications, reboot Windows and try printing again.
"Fail To Print", "A printer timeout error occurred" messages appear.	These messages may appear during printing. Just keep waiting until the machine finishes printing. If the message appears in standby mode or after printing has been completed, check the connection and/or whether an error has occurred.

Note Refer to the Microsoft Windows User Guide supplied with your computer for further information on Windows error messages.

Common Linux Problems

Condition	Suggested Solutions
The machine does not print.	• Check if the printer driver is installed on your system. Open Unified Driver Configurator and switch to the Printers tab in Printers configuration window to look at the list of available machines. Make sure that your machine is displayed on the list. If not, open Add new printer wizard to set up your machine. • Check if the machine is started. Open Printers configuration and select your machine on the printers list. Look at the description in the Selected printer pane. If its status contains Stopped, press the Start button. Normal operation of the machine should be restored. The “stopped” status might be activated when some problems in printing occurred. For instance, this could be an attempt to print a document when the port is claimed by a scanning application. • Ensure the port is not busy. Since functional components of the machine share the same I/O interface (port), simultaneous access of different “consumer” applications to the same port is possible. To avoid possible conflicts, only one of them at a time is allowed to gain control over the machine. The other “consumer” will encounter “device busy” response. You should open ports configuration and select the port assigned to your machine. In the Selected port pane you can see if the port is occupied by some other application. If this is the case, you should either wait for completion of the current job or press the Release port button. • Check if your application has special print option such as “-oraw”. If “-oraw” is specified in the command line parameter, then remove it to print properly. For Gimp front-end, select “print” -> “Setup printer” and edit command line parameter in the command item. • The CUPS (Common Unix Printing System) version distributed with SuSE Linux 9.2 (cups-1.1.21) has a problem with ipp (Internet Printing Protocol) printing. Use the socket printing instead of ipp or install a later version of CUPS (cups-1.1.22 or higher).
The machine does not print whole pages, and output is printed on half the page.	• It is a known problem that occurs on version 8.51 or earlier of Ghostscript, 64-bit Linux OS, and has been reported to bugs.ghostscript.com as Ghostscript Bug 688252. The problem is solved in AFPL Ghostscript v. 8.52 or above. Download the latest version of AFPL Ghostscript from http://sourceforge.net/projects/ghostscript/ and install it to solve this problem.
Error message “Cannot open port device file” displays when printing a document.	• Avoid changing print job parameters (via LPR GUI, for example) while a print job is in progress. Known versions of CUPS server break the print job whenever print options are changed and then try to restart the job from the beginning. Since Unified Linux Driver locks the port while printing, the abrupt termination of the driver keeps the port locked and unavailable for subsequent Print jobs. If this situation occurs, try to release the port by selecting Release port in Port configuration window.

Note Refer to the Linux User Guide supplied with your computer for further information on Linux error messages.

Common Macintosh Problems


Condition	Suggested Solutions
The machine does not print PDF files correctly. Some parts of graphics, text or illustrations are missing.	• Printing the PDF file as an image may enable the file to print. Turn on Print As Image from the Acrobat printing options. • It will take longer to print when you print a PDF file as an image.
The document has printed, but the print job has not disappeared from the spooler in Mac OS X10.3.2.	• Update your MAC OS to OS X 10.3.3 or higher.
Some letters are not displayed normally during the cover page printing.	• Mac OS cannot create the font during the cover page printing. The English alphabet and numbers are displayed normally on the cover page.
When printing a document in Macintosh with Acrobat Reader 6.0 or higher, colors print incorrectly.	• Make sure that the resolution setting in your machine driver matches the one in Acrobat Reader.





Note Refer to the Macintosh User Guide supplied with your computer for further information on Macintosh error messages.






Printing Quality Problems





If the inside of the machine is dirty or paper has been loaded improperly, there might be a reduction in print quality. See the table below to clear the problem.



Your printer is designed to produce consistently high-quality prints. If you observe print quality problems, use the information in this topic to diagnose the problem. For best results, use only Xerox Printing Media. For information on supported paper types and weights, see [Paper Supply](#) on page 123.

Condition	Suggested Solutions
Light Prints 	If the overall image is lighter than normal: - The paper may be damp. Replace the paper. - You may be using Draft mode. Turn off Draft mode. - The toner level may be low. If the Toner Cartridge is low on toner replace it. (See Customer Replaceable Units on page 90.)
Blank Prints 	If the entire printed page is blank with no visible print: - If you just installed a new Toner Cartridge, the yellow sealing tape may still be in place. Remove the tape. - Multiple sheets may have been fed from the paper tray at the same time. Remove the paper from the paper tray and fan it. Also, ensure that the paper is correctly loaded in the tray. - Printable data may not have been received from the computer. Print a Configuration page (see Configuration Page on page 79). If the Configuration page prints correctly, check the interface cable between the computer and printer, the printer setup, and application software. If the Configuration page is blank, replace the Toner Cartridge then reprint the Configuration page. If the Configuration page is still blank, contact a service representative.
Black Prints 	If the entire printed page is black: - The Toner Cartridge may not be installed properly. Remove the cartridge and reinsert it. - The Toner Cartridge may be defective. Remove the Toner Cartridge and install a new one. (See Customer Replaceable Units on page 90.) - Printable data from the computer may be corrupted. Print a Configuration page (see Configuration Page on page 79). If the Configuration page prints correctly, check the interface cable between the computer and printer, the printer setup, and application software. If the connections appear normal, contact a service representative.

Condition	Suggested Solutions
Horizontal Line Deletions 	If there are areas of print deletions that appear across the paper: • The Toner Cartridge may not be installed correctly. Remove and re-install the Toner Cartridge. (See Customer Replaceable Units on page 90.) • The Toner Cartridge may be defective or at the end of its life. Replace the Toner Cartridge. (See Customer Replaceable Units on page 90.) • The transfer roller may be defective. Replace the transfer roller (contained in the maintenance kit).
Vertical Line Deletions 	If there are areas of print deletions that form narrow lines: • The paper may be defective with creases, folds, etc. Replace the paper. • The Toner Cartridge may be defective or at the end of its life. Replace the Toner Cartridge. (See Customer Replaceable Units on page 90.) • The transfer roller may be defective. Replace the transfer roller (contained in the maintenance kit).
Horizontal Dark Streaks 	If horizontally aligned black lines, streaks or smears appear: • The Toner Cartridge may be installed improperly. Remove the cartridge and reinsert it. • The Toner Cartridge may be defective. Remove the Toner Cartridge and install a new one. (See Toner Cartridge on page 91.) • If the problem persists, the machine may require repair. Contact a service representative.
Vertical Dark Streaks 	If there are black lines that appear vertically on the page: • The paper path may be contaminated with toner. Print several blank sheets to remove the toner accumulations. • The Toner Cartridge may be defective or at the end of its life. Replace the toner cartridge. (See Customer Replaceable Units on page 90.) • The fuser may be defective. Replace the fuser (contained in the maintenance kit).

Condition	Suggested Solutions
Dark Spots or Marks 	If there are dark spots or marks that appear in a random pattern on the page: • The paper path may be contaminated with toner. Print several blank sheets to remove the toner accumulations. • The Toner Cartridge may be defective or at the end of its life. Replace the Toner Cartridge. (See Customer Replaceable Units on page 90.) • The fuser may be defective. Replace the fuser (in the maintenance kit). • The transfer roller may be defective. Replace the transfer roller (contained in the maintenance kit).
Unfused or Partially Fused Image 	If the printed image is not fully fused to the paper and easily rubs off: • The paper may be damp. Replace the paper. • Heavy or unusual paper may be in the tray. Replace the paper with an approved paper type. • The printer may be located in an environment with extreme temperature or humidity. Verify that the printer is located in an environment with the correct temperature, see Machine Specifications on page 122. • The fuser may be defective. Replace the fuser (contained in the maintenance kit).
Wrinkled Prints 	If the pages are wrinkled, creased or torn: • Ensure that the paper is loaded properly. • The paper may be damp. Replace the paper. • Check the paper type and quality. (See Media Specifications on page 62.) • The fuser may be defective. Replace the fuser (contained in the maintenance kit).
Blurred Prints 	If the image is blurred at the edges: • The paper may be damp. Replace the paper. • Check the paper type and quality. (See Media Specifications on page 62.) • The Toner Cartridge may be defective or at the end of its life. Replace the Toner Cartridge. (See Customer Replaceable Units on page 90.)
Random or Spot Deletions 	If areas of the print are extremely light or missing: • The paper may be damp. Replace the paper. • Check the paper type and quality. (See Media Specifications on page 62.) • The Toner Cartridge may be defective or at the end of its life. Replace the Toner Cartridge. (See Customer Replaceable Units on page 90.)

Condition	Suggested Solutions
Toner particles are around bold characters or pictures 	For toner adherence issues: Change the printer option and try again. Go to the Printing Preferences, click the Paper tab, and set the paper type to Recycled.
The top half of the paper is printed lighter than the rest of the paper 	For toner adherence issues: Change the printer option and try again. Go to the Printing Preferences, click the Paper tab, and set the paper type to Recycled.
Repetitive Defects 	If marks or voids repeatedly appear on the page use the following guidelines to determine the customer replaceable unit which needs replacing: - Repeated every 38 mm (1.5 in.), replace the Toner Cartridge. - Repeated every 52 mm (2.0 in.), replace Toner Cartridge. - Repeated every 94.4 mm (3.72 in.), replace the Toner Cartridge. - Repeated every 51 mm (2.0 in.), replace the transfer roller (contained in the maintenance kit). - Repeated every 94.2mm (3.7 in.), replace the fuser (contained in the maintenance kit).
Page Skew 	- Ensure that the paper is loaded properly. - Check the paper type and quality. (See Media Specifications on page 62.) - Ensure that the guides are not too tight or too loose against the paper stack. (See Loading Paper on page 56.)

Condition	Suggested Solutions
Curl or Wave 	• Ensure that the paper is loaded properly. • Check the paper type and quality. Both high temperature and humidity can cause paper curl. (See Media Specifications on page 62.) • Turn the stack of paper over in the tray. Also try rotating the paper 180° in the tray.
Curl 	If the printed paper is curled or paper does not feed into the machine: • Turn the stack of paper over in the tray. Also try rotating the paper 180° in the tray. • Change the printer options and try again. (See Paper/Output on page 31.)

Further Assistance

For any additional help visit our customer website at www.xerox.com or contact the *Xerox Support Center* quoting the machine serial number.

Xerox Support Center

If a fault cannot be resolved by following the display instructions, check [Error Messages](#) on page 104. If the difficulty persists, contact the *Xerox Support Center*. The *Xerox Support Center* will want to know the nature of the problem, the machine serial number, the fault code (if any) plus the name and location of your company.

Locating the Serial Number

Locate the machine serial number by taking the following steps:

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Information** option. Press **OK**.
3. Press the up/down arrows to highlight the **About this Printer** option. Press **OK**.
4. Press the up/down arrows to highlight the **Serial #** option and write down the serial number.



The serial number is also located on the center of the rear door.

Troubleshooting Reports

You can print reports about the machine status and any faults on the machine.

1. Press the **Menu** button on the control panel.
2. Press the up/down arrows to highlight the **Troubleshooting** option. Press **OK**.
3. The following Troubleshooting reports are available:

Option	Description
Error Messages	Prints a list of active error messages.
Last 40 Error messages	Prints a list of the last 40 fault messages and when they occurred.
Call for Assistance	Prints a report containing information about the machine and the current faults. Status information for each of the Customer Replaceable Units and machine configuration information is also included.
Print All Above Reports	This option enables you to print all the troubleshooting reports.


Option	Description
Test Prints	This feature enables you to print test prints that will help you and the Xerox Support Center diagnose image quality problems. Each test pattern checks parts of the printing process.
Hexadecimal Mode	Prints a page showing each character received by the printer and it's hexadecimal code, instead of interpreting the characters as PCL or PS.

Press the up/down arrows to highlight the option required. Press **OK**.

4. If printing a report, press the left arrow to highlight **Yes** at the **Print?** prompt and press **OK**.

Maintenance Assistant

Maintenance Assistant is a Smart eSolution available through CentreWare Internet Services. It monitors your machine and notifies Xerox support services of potential issues. It automates the notification, troubleshooting and repair process, minimizing machine downtime.

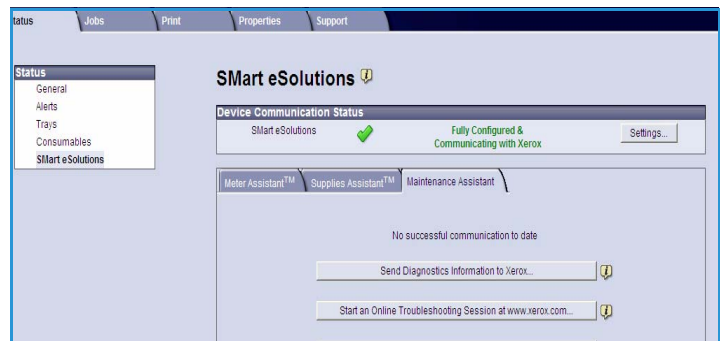

- If a problem occurs, you can use the **Send Diagnostics Information to Xerox...** option to immediately send information to Xerox which will assist with troubleshooting activities.
- Use the **Start an Online Troubleshooting session at www.xerox.com...** button to access the Xerox website for immediate advice on resolving machine problems.
- Use the **Download File to Your Computer...** button to save or view a CSV file containing detailed information about machine usage and any problems which have occurred on your machine.
- Use the **Refresh** button to view the latest status information.

For information about configuring the Maintenance Assistant settings, refer to the [System Administrator Guide](#).

Specifications

9

This chapter contains the specifications for the machine. The machine adheres to strict specifications, approvals and certifications. These specifications are designed to provide for the safety of users and to ensure that the machine operates in a fully functional state.

- [Machine Specifications](#) on page 122
- [Electrical Specifications](#) on page 126
- [Print Specifications](#) on page 127

Note Improvements in specifications and the appearance of the product may be made without prior notice. For more information on the specifications, contact your Xerox Representative.

Machine Specifications

Feature	Specification
Hardware Configuration	Processor Paper Tray 1 (Bypass) and Paper Tray 2 standard
Machine Size	Base configuration: width 18.7" x depth 21.3" x height 16.5" (W 476 x D 541 x H 420 mm)
Machine Weight	Approx 77.16 lb (35 kg)
Access	From the front
Printer Speed	Phaser 4600: 55 ppm one-sided (Letter) / 52 ppm (A4) Phaser 4620: 65 ppm one-sided (Letter) / 62 ppm (A4)
Warm Up Time	Cold Start: Approximately 40 seconds From Power Saver: Approximately 15 seconds
Temperature	Operating Condition: 10°C - 30°C Storage/Shipping Condition: -20°C - 40°C Optimum Operating Condition: 16°C - 28°C Note It is recommended to allow the machine to warm-up for a certain amount of time if it has been in storage or low temperature conditions.
Humidity	Operating Condition: 20 - 85 % RH Storage/Shipping Condition: 10 - 90 % RH Optimum Operating Condition: 30 - 70 % RH

Paper Supply

Paper Tray 1 (Bypass Tray)

Feature	Specification
Capacity	100 sheets 20 lb (80 g/m ²) bond paper per tray 20 sheets transparencies 10 envelopes
Paper Weights	Supported: 16 lb - 57 lb (60 g/m ² to 216 g/m ²) *
Paper Sizes	Paper Sizes: A5 (210 x 148 mm), A4 (210 x 297 mm), Letter (215 x 279 mm), FOLIO (216 x 330 mm), Legal (216 x 356 mm), Oficio (216 x 343 mm), JIS B5 (182 x 257 mm), ISO B5, Executive (184.2 x 266.7mm), Statement (140 x 216 mm), A6 Card (105 x 148mm), Index Card (76.2 x 127 mm), Postcard 4 x 6" (101.6 x 152.4 mm), Postcard (100 x 148 mm). Custom Sizes 3 x 5" to 8.5 x 14" (76.2 x 127 mm to 216 x 356 mm). Envelope Sizes: Monarch (98 x 190 mm), Com-10 (105 x 241 mm), DL (110 x 220 mm), C5 (162 x 229 mm) and C6 (114 x 162 mm).

Paper Tray 2

Feature	Specification
Capacity	520 sheets 20 lb (80 g/m ²) bond paper 20 sheets transparencies 50 envelopes
Paper Weights	Supported: 16 lb - 43 lb (60 g/m ² to 163 g/m ²) *
Paper Sizes	Paper Sizes: A5 (210 x 148 mm), A4 (210 x 297 mm), Letter (215 x 279 mm), FOLIO (216 x 330 mm), Legal (216 x 356 mm), Oficio (216 x 343 mm), JIS B5 (182 x 257 mm), ISO B5, Executive (184.2 x 266.7mm), Statement (140 x 216 mm), A6 Card (105 x 148mm), Postcard 4 x 6" (101.6 x 152.4 mm), Postcard (100 x 148 mm). Custom Sizes 3.8 x 5.8" to 8.5 x 14" (98.6 x 148.5 mm to 216 x 356 mm). Envelope Sizes: Monarch (98 x 190 mm), Com-10 (105 x 241 mm), DL (110 x 220 mm), C5 (162 x 229 mm) and C6 (114 x 162 mm).

Paper Trays 3, 4, 5 & 6 (optional)

Feature	Specification
Capacity	520 sheets 20 lb (80 g/m ²) bond paper per tray
Paper Weights	Supported: 16 lb - 43 lb (60 g/m ² to 163 g/m ²) *
Paper Sizes	A5 (210 x 148 mm), A4 (210 x 297 mm), Letter (215 x 279 mm), FOLIO (216 x 330 mm), Legal (216 x 356 mm), Oficio (216 x 343 mm), JIS B5 (182 x 257 mm), ISO B5, Executive and Statement. Custom Sizes 3.8 x 7" to 8.5 x 14" (98.6 x 177.8 mm to 216 x 356 mm).

* Using heavier paper weights can reduce the life expectancy of components.

High Capacity Feeder (optional)

Feature	Specification
Capacity	2000 sheets 20 lb (80 g/m ²) bond paper
Paper Weights	16 lb - 43 lb (60 g/m ² to 163 g/m ²)
Paper Sizes	A4 (210 x 297 mm), Letter (215 x 279 mm), FOLIO (216 x 330 mm) and Legal (216 x 356 mm)

Output Modules

Output Tray

Feature	Specification
Capacity	500 sheets of 20 lb (80 g/m ²) bond paper

Finisher

Feature	Specification
Paper Weights	16 lb - 53 lb (60 g/m ² to 163 g/m ²)
Paper Sizes	A5 SEF to Legal SEF
Staples	5000 staples per cartridge 50 sheets of 20 lb (80 g/m ²) bond paper can be stapled 1 staple position

Mailboxes

Feature	Specification
Paper Weights	16 lb - 53 lb (60 g/m ² to 163 g/m ²)
Paper Sizes	A5 SEF to Legal SEF
Mailbox Bins	4 Mailbox Bins Each bin can hold 100 sheets of 20 lb (80 g/m ²) bond paper

Electrical Specifications

Feature	Specification
Frequency	50/60 Hz
Electrical Voltage	110 - 127 VAC / 220 - 240 VAC
Average Power Consumption	Power Saver (sleep) mode: 10 Watts - less than 10 Watts Stand By mode: 10 Watts - Less than 93 Watts Running mode: 10 Watts - Less than 900 Watts
Average Power Consumption - 55 PPM Models	Power Saver (sleep) mode: Less than 10 Watts Stand By mode: Less than 100 Watts Running mode: Less than 820 Watts
Average Power Consumption - 65 PPM Models	Power Saver (sleep) mode: Less than 10 Watts Stand By mode: Less than 120 Watts Running mode: Less than 900 Watts

Print Specifications

Feature	Specification
Compatibility	Windows 2000 / XP / 2003 / Vista / 2008 MAC OS X 10.3 - 10.5 Linux
Speed Phaser 4600	55 ppm one-sided (Letter) / 52 ppm (A4)
Speed Phaser 4620	65 ppm one-sided (Letter) / 62 ppm (A4)
Maximum Paper Size	8.5" x 14" Legal (216 mm x 356 mm)
Effective Printing Width	8.18" (208 mm) for Letter / 7.95" (202 mm) for A4
Resolution	True 600 x 600, 1200 x 1200 (Enhanced)
Resolution Modes	300 x 300 dpi / 600 x 600 dpi / 1200 x 1200 (Enhanced)
Standard Printer Memory	256 MB
PDL / PCL	PCL5e, PCL6, PS/3-clone

Safety

10

This chapter includes:

- [Notices and Safety](#) on page 130
- [Safety Labels and Symbols](#) on page 131
- [Operational Safety Information](#) on page 132
- [Basic Regulations](#) on page 136
- [Material Safety Data](#) on page 139
- [Product Recycling and Disposal](#) on page 140
- [Energy Program Compliance](#) on page 142
- [EH&S Contact Information](#) on page 143

Notices and Safety

Please read the following instructions carefully before operating the machine. Refer to them as needed to ensure the continued safe operation of your machine.

Your Xerox machine and supplies have been designed and tested to meet strict safety requirements. These include safety agency evaluation and certification, and compliance with electromagnetic regulations and established environmental standards.

The safety and environment testing and performance of this machine have been verified using Xerox materials only.

 **WARNING:** Unauthorized alterations, which may include the addition of new functions or connection of external machines, may impact the machine certification. Please contact your Xerox Representative for more information.

Safety Labels and Symbols

All warnings and instructions marked on or supplied with the machine should be followed.

This WARNING alerts users to areas of the machine where there is the possibility of personal injury.



This WARNING alerts users to areas of the machine where there are heated surfaces, which should not be touched.



Operational Safety Information

Your Xerox machine and supplies have been designed and tested to meet strict safety requirements. These include safety agency examination, approval, and compliance with established environmental standards. To ensure the continued safe operation of your Xerox machine, follow these safety guidelines at all times:

Electrical Supply

This section provides important electrical supply safety information that you should read before installing or using the machine.

Read the information in the following sections:

- [Power Outlet Electrical Safety](#) on page 132.
- [Power Cord Electrical Safety](#) on page 132.
- [Laser Safety Information](#) on page 133.
- [Machine Safety](#) on page 133.
- [Emergency Power Off](#) on page 134.
- [Disconnect Machine](#) on page 134.

Power Outlet Electrical Safety

This machine must be operated from the type of electrical supply indicated on the data plate label located on the rear cover of the machine. If you are not sure that your electrical supply meets the requirements, please consult your local power company or a licensed electrician for advice.

The electrical supply outlet should be installed near the machine and should be easily accessible.



⚠ WARNING: This machine must be connected to a protective earth circuit. This machine is supplied with a plug that has a protective earth pin. This plug will only fit into an earthed electrical outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact a licensed electrician to replace the outlet. Always connect the machine to a correctly grounded power outlet. If in doubt, have the outlet checked by a qualified electrician. Improper connection of the machine-grounding conductor can result in electrical shock.

Power Cord Electrical Safety

- Use only the power cord supplied with this machine.
- Plug the power cord directly into a grounded electrical outlet. Do not use an extension cord. If you do not know whether or not an outlet is grounded, consult a qualified electrician.
- Do not place this machine where people might step on or trip on the power cord.
- Do not place objects on the power cord.

Laser Safety Information

 **CAUTION:** Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous light exposure.

With specific regard to laser safety, the machine complies with performance standards for laser products set by government, national and international agencies as a Class 1 laser product. It does not emit hazardous light, as the beam is totally enclosed during all phases of customer operation and maintenance.

Machine Safety

This machine has been designed to provide operator access to safe areas only. Operator access to hazardous areas is restricted using covers or guards, which require a tool to enable removal. Never remove the covers or guards that protect hazardous areas.

Machine Safety - Do These

 **WARNING:** Do not use aerosol cleaners. Aerosol cleaners can be explosive or flammable when used on electromechanical equipment.

- Always follow all warnings and instructions that are marked on or supplied with the machine.
- Before cleaning this machine, unplug the machine from the electrical outlet. Always use materials specifically designated for this machine, the use of other materials may result in poor performance and create a hazardous situation.
- Always exercise care when moving or relocating the machine. Please contact your local Xerox dealer to arrange relocation of the machine to a location outside of your building.
- Always locate the machine on a solid support surface (not on plush carpet) that has adequate strength to support the weight of the machine.
- Always locate the machine in an area that has adequate ventilation and room for servicing.
- Always unplug this machine from the electrical outlet before cleaning.

Note Your Xerox machine is equipped with an energy saving function to conserve power when the machine is not in use. The machine may be left on continuously.

Machine Safety - Do Not Do These

 **WARNING:** Do not use aerosol cleaners. Aerosol cleaners can be explosive or flammable when used on electromechanical equipment.

- Never use a ground adapter plug to connect the machine to a power outlet that lacks a ground connection terminal.
- Never attempt any maintenance function that is not specifically described in this documentation.
- Never obstruct ventilation openings. They are provided to prevent overheating.
- Never remove covers or guards that are fastened with screws. There are no operator serviceable areas within these covers.
- Never locate the machine near a radiator or any other heat source.

- Never push objects of any kind into the ventilation openings.
- Never override or “cheat” any of the electrical or mechanical interlock devices.
- Never place this machine where people might step on or trip on the power cord.
- This machine should not be placed in a room unless proper ventilation is provided.

Please contact your local Authorized dealer for further information.

Emergency Power Off

If any of the following conditions occur, turn off the machine immediately and disconnect the power cable(s) from the electrical outlet(s). Contact an authorized Xerox Service Representative to correct the problem:

- The machine emits unusual odors or makes unusual noises.
- The power cable is damaged or frayed.
- A wall panel circuit breaker, fuse or other safety machine has been tripped.
- Liquid is spilled into the machine.
- The machine is exposed to water.
- Any part of the machine is damaged.

Disconnect Machine

The power cable is the disconnect device for this machine. It is attached to the back of the machine as a plug-in device. To remove all electrical power from the machine, disconnect the power cable from the electrical outlet.

Ozone Safety Information

This machine will produce ozone during normal operation. The ozone produced is heavier than air and is dependent on print volume. Providing the correct environmental parameters as specified in the Xerox installation procedure will ensure that the concentration levels meet safe limits.

If you need additional information about ozone, please request the Xerox publication Ozone by calling 1-800-828-6571 in the United States and Canada. In other markets please contact your authorized local dealer or Service Provider.

Maintenance Information

 **WARNING:** Do not use aerosol cleaners. Aerosol cleaners can be explosive or flammable when used on electromechanical equipment.

- Any operator machine maintenance procedures will be described in the user documentation supplied with the machine.
- Do not carry out any maintenance on this machine which is not described in the customer documentation.
- Use supplies and cleaning materials only as directed in the user documentation.
- Do not remove covers or guards that are fastened with screws. There are no parts behind these covers that you can maintain or service.

Consumables Information

- Store all consumables in accordance with the instructions given on the package or container.
- Keep all consumables away from the reach of children.
- Never throw toner, Toner Cartridges or toner containers into an open flame.

Product Safety Certification

This machine is certified by the following Agency using the Safety standards listed.

Agency	Standard
Underwriters Laboratories Inc.	UL60950-1 2nd Edition (USA/Canada)
	NEMKO 2nd Edition

This machine has been manufactured under a registered ISO9001 Quality system.

Basic Regulations

Xerox has tested this machine to electromagnetic emission and immunity standards. These standards are designed to mitigate interference caused or received by this machine in a typical office environment.

United States (FCC Regulations)

This machine has been tested and found to comply with the limits for a Class A digital machine, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial environment. This machine generates, uses, and can radiate radio frequency energy. If it is not installed and used in accordance with these instructions, it may cause harmful interference to radio communications. Operation of this machine in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

If this machine does cause harmful interference to radio or television reception, which can be determined by turning the machine off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiver.
- Increase the separation between the machine and receiver.
- Connect the machine into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/television technician for help.

Any changes or modifications not expressly approved by Xerox could void the user's authority to operate the machine. To ensure compliance with Part 15 of the FCC rules, use shielded interface cables.

Canada (Regulations)

This Class A digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe A est conforme à la norme NMB-003 du Canada.

European Union

 **WARNING:** This is a Class A product. In a domestic environment this machine may cause radio interference in which case the user may be required to take adequate measures.



The CE mark applied to this machine symbolizes Xerox's declaration of conformity with the following applicable Directives of the European Union as of the dates indicated:

- December 12, 2006: Low Voltage Directive 2006/95/EC. Approximation of the laws of the member states related to low voltage equipment.
- December 15, 2004: Electromagnetic Compatibility Directive 2004/108/EC. Approximation of the laws of the member states related to electromagnetic compatibility.
- March 9, 1999: Radio & Telecommunications Terminal Equipment Directive 1999/5/EC.

This machine, if used properly in accordance with the user's instructions, is neither dangerous for the consumer nor for the environment.

To ensure compliance with European Union regulations, use shielded interface cables.

A signed copy of the Declaration of Conformity for this machine can be obtained from Xerox.

Turkey RoHS Regulation

In compliance with Article 7 (d). We hereby certify

"It is compliant with the EEE Regulation."

"EEE yönetmeliğine uygundur"

China RoHS Regulation

产品中有毒有害物质或元素的名称及含量

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr ⁶⁺)	多溴联苯 (PBB)	多溴联苯醚 (PBDE)
塑料	○	○	○	○	○	○
金属 (机箱)	X	○	○	○	○	○
印刷电路部件 (PCA)	X	○	○	○	○	○
电缆 / 连接器	X	○	○	○	○	○
电源设备	X	○	○	○	○	○
电源线	X	○	○	○	○	○
机械部件	X	○	○	○	○	○
卡盒部件	X	○	○	○	○	○
定影部件	X	○	○	○	○	○
扫描仪部件 - CCD (如果有)	X	X	○	○	○	○
扫描仪部件 - 其它 (如果有)	X	○	○	○	○	○
印刷电路板部件 (PBA)	X	○	○	○	○	○
墨粉	○	○	○	○	○	○
滚筒	○	○	○	○	○	○

○：表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求以下。

×：表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T 11363-2006 标准规定的限量要求。

以上表为目前本产品含有有毒有害物质的信息。本信息由本公司的配套厂家提供，经本公司审核后而做成，本产品的部分部件含有有毒有害物质，这些部件是在现有科学技术水平下暂时无可替代物质，但富士施乐将会一直为满足 SJ/T 11363-2006 标准而做不懈的努力。

Material Safety Data

For Material Safety Data information regarding your printer, go to:

North America: www.xerox.com/msds

European Union: www.xerox.com/environment_europe

For the Customer Support Center phone numbers, go to www.xerox.com/office/worldcontacts.

Product Recycling and Disposal

USA & Canada

Xerox operates a worldwide equipment take back and reuse/recycle program. Contact your Xerox sales representative (1-800-ASK-XEROX) to determine whether this Xerox machine is part of the program. For more information about Xerox environmental programs, visit www.xerox.com/environment.html.

If you are managing the disposal of your Xerox machine, please note that the machine may contain lead, mercury, Perchlorate, and other materials whose disposal may be regulated due to environmental considerations. The presence of these materials is fully consistent with global regulations applicable at the time that the machine was placed on the market. For recycling and disposal information, contact your local authorities. In the United States, you may also refer to the Electronic Industries Alliance website: <http://www.eiae.org/>.

European Union

WEEE Directive 2002/96/EC

Product Recycling and Disposal (EU Professional/Business Environment)



Application of this symbol on your equipment is confirmation that you must dispose of this equipment in compliance with agreed national procedures. In accordance with European legislation, end of life electrical and electronic equipment subject to disposal must be managed within agreed procedures.

(EU Battery Directive)



These symbols on the products, and/or accompanying documents mean that used electrical and electronic products and batteries should not be mixed with general household waste.

For proper treatment, recovery and recycling of old products and used batteries, please take them to applicable collection points, in accordance with your national legislation and the Directive 2002/96/EC and 2006/66/EC.

By disposing of these products and batteries correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment which could otherwise arise from inappropriate waste handling.

For more information about collection and recycling of old products and batteries, please contact your local municipality, your waste disposal service or the point of sale where you purchased the items. Penalties may be applicable for incorrect disposal of this waste, in accordance with national legislation.

For Business Users in the European Union

If you wish to discard electrical and electronic equipment, please contact your dealer or supplier for further information.

Information on disposal in other countries outside the European Union

These symbols are only valid in the European Union. If you wish to discard these items, please contact your local authorities or dealer and ask for the correct method of disposal.



Note for the Battery Symbol

This wheeled bin symbol may be used in combination with a chemical symbol. This establishes compliance with the requirements set out by the Directive.

Energy Program Compliance

All Markets

ENERGY STAR

The Xerox Phaser 4600/4620 is ENERGY STAR® qualified under the ENERGY STAR Program Requirements for Imaging Equipment.



The ENERGY STAR and ENERGY STAR MARK are registered United States trademarks. The ENERGY STAR Office Equipment Program is a team effort between U.S., European Union and Japanese governments and the office equipment industry to promote energy-efficient copiers, printers, fax, multifunction machines, personal computers, and monitors. Reducing machine energy consumption helps combat smog, acid rain and long-term changes to the climate by decreasing the emissions that result from generating electricity.

Xerox ENERGY STAR equipment is preset at the factory, to switch to Power Saver Mode after a preset time following the last print out. The default time set for the Xerox Phaser 4600/4620 is 15 minutes. A more detailed description of this feature can be found in the User Guide. Refer to [Machine Settings](#) on page 82 for instructions on how to change the **Power Saver** setting.

EH&S Contact Information

For more information on Environment, Health, and Safety in relation to this Xerox machine and supplies, please contact the following customer help lines:

USA: 1-800 828-6571

Canada: 1-800 828-6571

Europe: +44 1707 353 434

Machine safety information is also available on the Xerox website:

www.xerox.com/about-xerox/environment

Index

Numerics

- 2-Sided, 33
 - Printing, 41
- 4-Bin Mailbox, 9, 34, 125

A

- Accessing Tools, 78
- Accounting Enablement, 88
- Active Jobs, 46, 71
- Add Printer Wizard, 13
- Adding Paper, 56
- Advanced Options, 39
- Advanced Paper Selection, 33
- Alerts, 67
- Alphanumeric Keys, 11
- Arrow buttons, 11

B

- Back button, 11
- Basic Safety Regulations, 136
- Billing, 68
- Booklet Layout, 37
- Buttons, 11

C

- Calling for Service, 25, 118
- Canada (Regulations), 136
- Card Reader Slot, 9
- Caring for your Machine, 90
- CentreWare Internet Services, 65
 - Alerts, 67
 - General, 67
 - Jobs, 71
 - Print, 73
 - Properties, 74
 - SMart eSolutions, 68
 - Status, 67
 - Support, 75
 - Trays, 68
- Changing Printer Settings, 40

- Cleaning
 - Control Panel, 95
- Cleaning Tasks, 23
- Clone Printer, 87
- Common Problems
 - Linux, 111
 - Macintosh, 112
 - PostScript, 109
 - Windows, 110
- Completed Jobs, 50, 72
- Configuration Page, 79
- Consumables, 23
- Consumables Safety Information, 135
- Control Options, 29
- Control Panel, 9
- Control Panel Overview, 11
- Covers, 34, 35
- Customer Replaceable Units, 23, 90

D

- Display Screen, 11
- Documentation, 25
- Double-Sided, 33
- Downloading the Printer Driver, 13
- Drum, 92
- Duplex Unit, 9
- Duplexing, 33

E

- Electrical Specifications, 126
 - Frequency, 126
 - Power Consumption, 126
 - Voltage, 126
- Electrical Supply, 132
- Energy Program Compliance, 142
- Energy Saver button, 11
- ENERGY STAR, 142
- Error Messages, 104
- European Union, 137
- Exceptions, 34, 36

F

- Fault Clearance, 97
- Fault Messages, 104
- Faults, 97
 - Linux, 111
 - Macintosh, 112

- Paper Feeding, 106
- PostScript Problems, 109
- Print Quality, 113
- Printing, 107
- Windows Printing, 110
- FCC Regulations, 136
- File Security, 85
- Finisher, 34, 124
- Finisher (Optional), 9
- Front and Rear View, 9
- Further Assistance, 25, 118
- Fuser Unit, 10

G

- General Care, 23, 90
- General Care and Troubleshooting, 89
- General Setup, 82
- Getting Started, 7
- Graphics, 41

H

- Health & Safety Contact Information, 143
- Help, 25, 118
- Help button, 11
- High Capacity Feeder, 9, 17, 58, 124

I

- Image Overwrite, 85
- Inserting the USB Memory Device, 52
- Inserts, 34, 35
- Installing the Printer Driver, 13
- Internal Components, 10
- Introduction to your Machine, 8

J

- Jams, Paper, 97
- Job Type, 31
- Jobs, 45, 71
 - Active, 46
 - Completed, 50
 - Personal, 47
 - Saved, 48, 49
 - Secure, 47
- Jobs List, 46

K

- Keypad, 11

L

- Layout/Watermark, 37
- Linux
 - Printer Properties, 43
- Linux Printing, 42
- Linux Problems, 111
- Loading Paper, 16, 56
 - High Capacity Feeder, 17, 58
 - Media Types, 63
 - Optional Trays, 16, 57
 - Tray 1 (Bypass Tray), 16, 56
 - Tray 2, 16, 57
- Locating the Serial Number, 118
- Log On/Off, 24

M

- Machine Cleaning, 23
- Machine Configurations, 10
 - Accessibility, 122
 - Hardware, 122
 - Machine Size, 122
 - Warm Up Time, 122
- Machine Memory, 127
- Machine Models, 8
- Machine Overview, 9
- Machine Parts, 9
- Machine Power, 12
- Machine Safety, 133
- Machine Serial Number, 118
- Machine Settings, 82
- Machine Setups, 77
- Machine Specifications, 122
- Machine Speed, 122, 127
- Macintosh
 - 2-Sided, 41
- Macintosh Printing
 - Graphics, 41
 - Layout, 40
 - Pages per Sheet, 40
 - Paper, 40
 - Toner Save Mode, 41
 - Xerox Features, 41
- Macintosh Problems, 112
- Mailbox, 34, 125
- Maintenance, 23, 90

- Maintenance Assistant, 68
- Maintenance Safety Information, 135
- Material Safety Data, 139
- Media Guidelines, 62
- Media Specifications, 62
- Media Types, 63
- Menu button, 11
- Messages, 104
- Meter Assistant, 68
- Meter Reading, 68
- Models and Components, 10
- Moving the Machine, 96
- Multiple Images, 37

N

- Network Port, 9
- Network Settings, 80
- Network Setups, 74
- Number of Prints, 68
- Numeric Keys, 11

O

- OK button, 11
- On Demand Overwrite, 85
- On/Off, 12
- Operational Safety, 129
- Operational Safety Information, 132
- Optional Components, 10
- Optional Paper Trays, 16, 57
- Output, 124
- Output Modules, 124
- Output Options, 34
- Output Tray, 9, 124
- Overview of your Machine, 9

P

- Page Layout, 37
- Paper, 32
- Paper Feeding Problems, 106
- Paper Jams, 97
- Paper Level Indicator, 9
- Paper Loading, 16, 56
 - Media Types, 63
- Paper Supply Specifications, 123
- Paper Tray 1 (Bypass Tray), 9, 16, 56, 123
- Paper Tray 2, 9, 16, 57, 123
- Paper Tray 3 (Optional), 9, 16, 57, 124

- Paper Tray 4 (Optional), 9, 16, 57, 124
- Paper Tray 5 (Optional), 124
- Paper Tray 6 (Optional), 124
- Paper Tray Management, 59
- Paper/Output, 31
- PCL, 127
- PCL Setup, 81
- PDL, 127
- Personal & Secure Jobs, 71
- Personal Jobs, 47
- PIN, 24
- PostScript Setup, 81
- Power On/Off, 12
- Power Outlet Electrical Safety, 132
- Power Switch, 9
- Preparing Paper, 56
- Print, 27, 73
 - Advanced Options, 39
 - Advanced Paper Selection, 33
 - Control Options, 29
 - Layout/Watermark, 37
 - Linux, 42
 - Linux Printer Properties, 43
 - Macintosh 2-Sided, 41
 - Macintosh Fit to Page, 41
 - Macintosh Graphics, 41
 - Macintosh Layout, 40
 - Macintosh Pages per Sheet, 40
 - Macintosh Paper, 40
 - Macintosh Printer Settings, 40
 - Macintosh Reverse Duplex Printing, 41
 - Macintosh Toner Save, 41
 - Macintosh Xerox Features, 41
 - Output Options, 34
 - Paper Selection, 32
 - Paper/Output, 31
 - Special Pages, 34
- Print Procedure, 30
- Print Specifications, 127
- Printer Cloning, 87
- Printer Driver, 28
 - Download, 13
 - Installation, 13
- Printer Memory, 127
- Printer Settings
 - Macintosh, 40
- Printer Software CD, 13
- Printer Speed, 122, 127
- Printing a Saved Job, 48
- Printing from USB Memory Device, 53

- Printing Problems, 107
- Printing Quality Problems, 113
- Printing Reports, 118
- Printing using Windows, 29
- Problem Solving, 97
- Problems
 - Linux, 111
 - Macintosh, 112
 - Paper Feeding, 106
 - PostScript, 109
 - Print Quality, 113
 - Printing, 107
 - Windows Printing, 110
- Product Recycling and Disposal, 140
- Product Safety Certification, 135
- Properties, 74
- PS, 127

Q

- Quality Problems, 113

R

- Rear Door, 9
- Regulations, 129, 136
- Relocating your Machine, 96
- Replaceable Units, 23, 90
- Reports, 118
- Resolution, 127

S

- Safety, 129
 - Certification, 135
 - Consumables, 135
 - Electrical Supply, 132
 - Labels and Symbols, 131
 - Maintenance, 135
 - Operational Safety, 132
 - Recycling and Disposal, 140
 - Regulations, 136
- Safety Contact Information, 143
- Saved Jobs, 48, 49, 72
- Saving a Job, 49
- Secure Jobs, 47
- Security, 85
- Sending a Print Job, 27, 30
- Serial Number, 118
- Service Call, 25

- Services
 - CentreWare Internet Services, 65
 - Print, 27
- Settings
 - Accounting, 88
 - General, 82
 - Machine, 82
 - Network, 80
 - Paper Trays, 61
 - PCL, 81
 - PostScript, 81
 - Tray Management, 59
- Setup, 77, 80
 - Accessing Tools, 78
- SMart eSolutions, 68
- SMart Kit Drum Cartridge, 10, 23, 90, 92
- Software, 13
- Solving Problems, 97
- Special Feature Options, 86
- Special Media, 63
- Special Pages, 34
- Specifications
 - Electrical, 126
 - Machine, 122
 - Media, 62
 - Output, 124
 - Paper Supply, 123
 - Print, 127
- Speed, 122, 127
- Staple Cartridge, 23, 90, 93
- Staple Cartridge Cover, 9
- Stapling, 34, 124
- Status, 67
- Status LED, 11
- Stop button, 11
- Supplies Assistant, 68
- Support, 75
- System Administrator Guide, 25

T

- Tips for Avoiding Paper Jams, 97
- Toner Cartridge, 10, 23, 90
- Toner Save Mode, 41
- Tools, 78
- Total Impressions, 68
- Transfer Roller, 10
- Transparency Separators, 33
- Tray Management, 59
- Tray Management Settings, 59

- Tray Paper Settings, 61
- Trays, 16, 68
- Troubleshooting, 89, 97
- Troubleshooting Reports, 118
- Turkey RoHS Regulation, 137
- Type A USB Port, 9
- Type B USB Port, 9

U

- United States (FCC Regulations), 136
- USB Memory Device
 - Printing, 53
- USB Memory Port, 9
- User Guide, 25
- User ID, 24
- Using the Machine, 7

W

- Waste Toner Bottle, 23, 90
- Watermark, 38
- WEEE Directive 2002/96/EC, 141
- Welcome Center, 25, 118
- Windows Printing, 29
- Windows Problems, 110

X

- Xerox Secure Access, 24
- Xerox Support Center, 25, 118

